
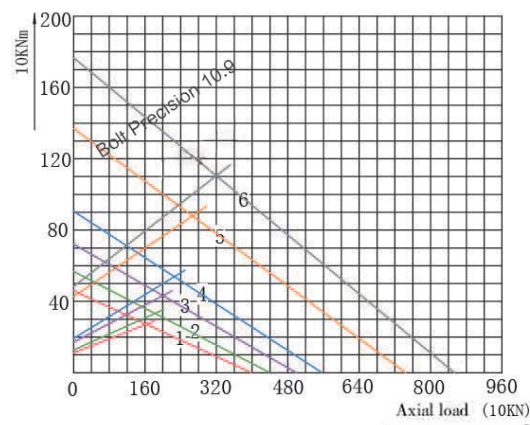
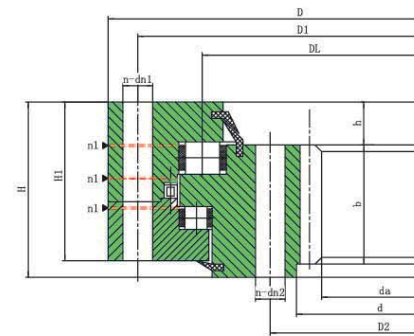
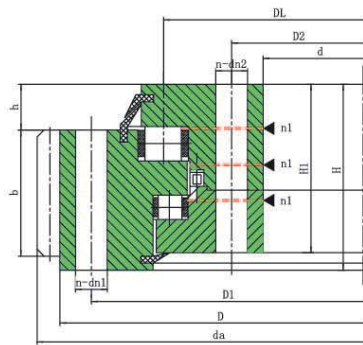






Three-row roller slewing bearing.

Code	Curve	D (mm)	d (mm)	H (mm)	D ₁ (mm)	D ₂ (mm)	d _{n1} d _{n2} (mm)	d _{m1} d _{m2} (mm)	L (mm)	n	n ₁	H ₁ (mm)	h (mm)	b (mm)	m (mm)	d _a (mm)	z	d _a (mm)	z
13.25.500	1	634	366	148	598	402	18	M16	32	24	4	138	32	80	5 6	664 664.8	130 108	337 338.4	68 57
13.25.560	2	694	426	148	658	462	18	M16	32	24	4	138	32	80	5 6	724 724.8	142 118	397 398.4	80 67
13.25.630	3	764	496	148	728	532	18	M16	32	28	4	138	32	80	6 8	808.8 806.4	132 98	458.4 459.2	77 58
13.25.710	4	844	576	148	808	612	18	M16	32	28	4	138	32	80	6 8	886.8 886.4	145 108	536.4 539.2	90 68
13.25.800	5	964	636	182	920	680	22	M20	40	36	4	172	40	120	8 10	1006.4 1008	123 98	595.2 594	75 60
13.32.900	6	1064	736	182	1020	780	22	M20	40	36	4	172	40	120	8 10	1102.4 1108	135 108	691.2 694	87 70

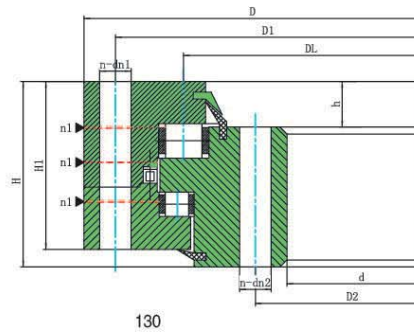





Three-row roller slewing bearing.

Code	Curve	D (mm)	d (mm)	H (mm)	D ₁ (mm)	D ₂ (mm)	d _{n1} d _{n2} (mm)	d _{m1} d _{m2} (mm)	L (mm)	n	n ₁	H ₁ (mm)	h (mm)	b (mm)	m (mm)	d _a (mm)	z	d _a (mm)	z
13.32.1000	7	1164	836	182	1120	880	22	M20	40	40	5	172	40	120	10 12	1218 1221.6	119 99	784 784.8	79 66
13.32.1120	8	1284	956	182	1240	1000	22	M20	40	40	5	172	40	120	10 12	1338 1341.6	131 109	904 904.8	91 76
13.40.1250	9	1445	1055	220	1393	1107	26	M24	48	45	5	210	50	150	12 14	1509.6 1509.2	123 105	988.8 985.6	83 71
13.40.1400	10	1595	1205	220	1543	1257	26	M24	48	45	5	210	50	150	12 14	1665.6 1663.2	136 116	1144.8 1139.6	96 82
13.40.1600	11	1795	1405	220	1743	1457	26	M24	48	48	6	210	50	150	14 16	1873.2 1868.8	131 114	1335.6 1334.4	96 84
13.40.1800	12	1995	1605	220	1943	1657	26	M24	48	48	6	210	50	150	14 16	2069.2 2076.8	145 127	1531.6 1526.4	110 96

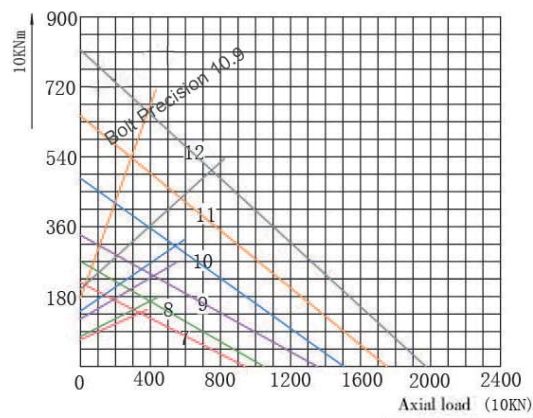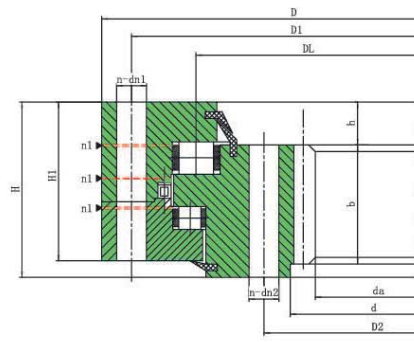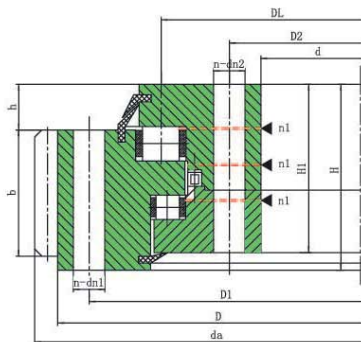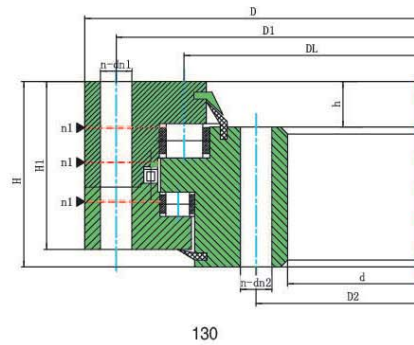

Three-row roller slewing bearing.

Code	Curve	D (mm)	d (mm)	H (mm)	D ₁ (mm)	D ₂ (mm)	d _{n1} d _{n2} (mm)	d _{m1} d _{m2} (mm)	L (mm)	n	n ₁	H ₁ (mm)	h (mm)	b (mm)	m (mm)	d _a (mm)	z	d _a (mm)	z
13. 45. 2000	13	2221	1779	231	2155	1845	33	M30	60	60	6	219	54	160	16 18	2300.8 2300.4	141 125	1702.4 1699.2	107 95
13. 45. 2240	14	2461	2019	231	2395	2085	33	M30	60	60	6	219	54	160	16 18	2556.8 2552.4	157 139	1926.4 1933.2	121 108
13. 45. 2500	15	2721	2279	231	2655	2345	33	M30	60	72	8	219	54	160	18 20	2822.4 2816	154 138	2185.2 2188	122 110
13. 45. 2800	16	3021	2579	231	2955	2645	33	M30	60	72	8	219	54	160	18 20	3110.4 3116	170 153	2491.2 2488	139 125
13. 50. 3150	17	3432	2868	270	3342	2958	45	M42	84	72	8	258	65	180	20 22	3536 3537.6	174 158	2768 2758.8	139 126
13. 50. 3550	18	3832	3268	270	3742	3358	45	M42	84	72	8	258	65	180	20 22	3936 3933.6	194 176	3168 3154.8	159 144

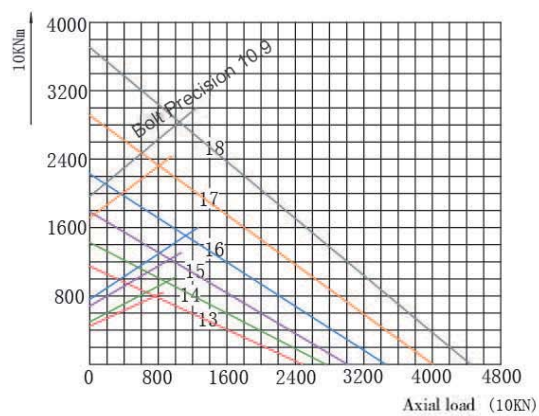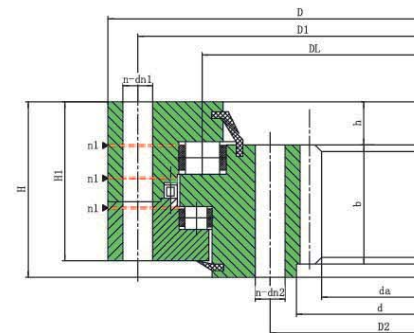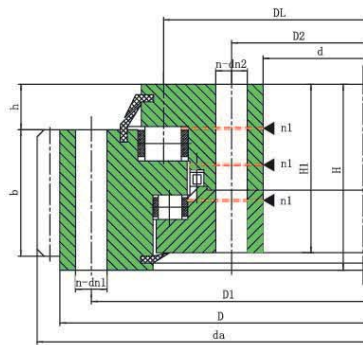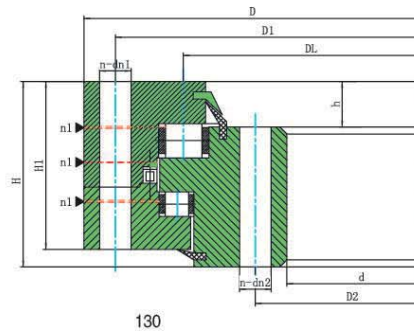

Three-row roller slewing bearing.

Code	Curve	D (mm)	d (mm)	H (mm)	D ₁ (mm)	D ₂ (mm)	d _{n1} d _{n2} (mm)	d _{a1} d _{a2} (mm)	L (mm)	n	n ₁	H ₁ (mm)	h (mm)	b (mm)	m (mm)	d _a (mm)	z	d _a (mm)	z
13.50.4000	19	4282	3718	270	4192	3808	45	M42	84	80	8	258	65	180	22 25	4395.6 4395	197 173	3616.8 3610	165 145
13.50.4500	20	4782	4218	270	4692	4308	45	M42	84	80	8	258	65	180	22 25	4901.6 4895	220 193	4122.8 4110	188 165

