
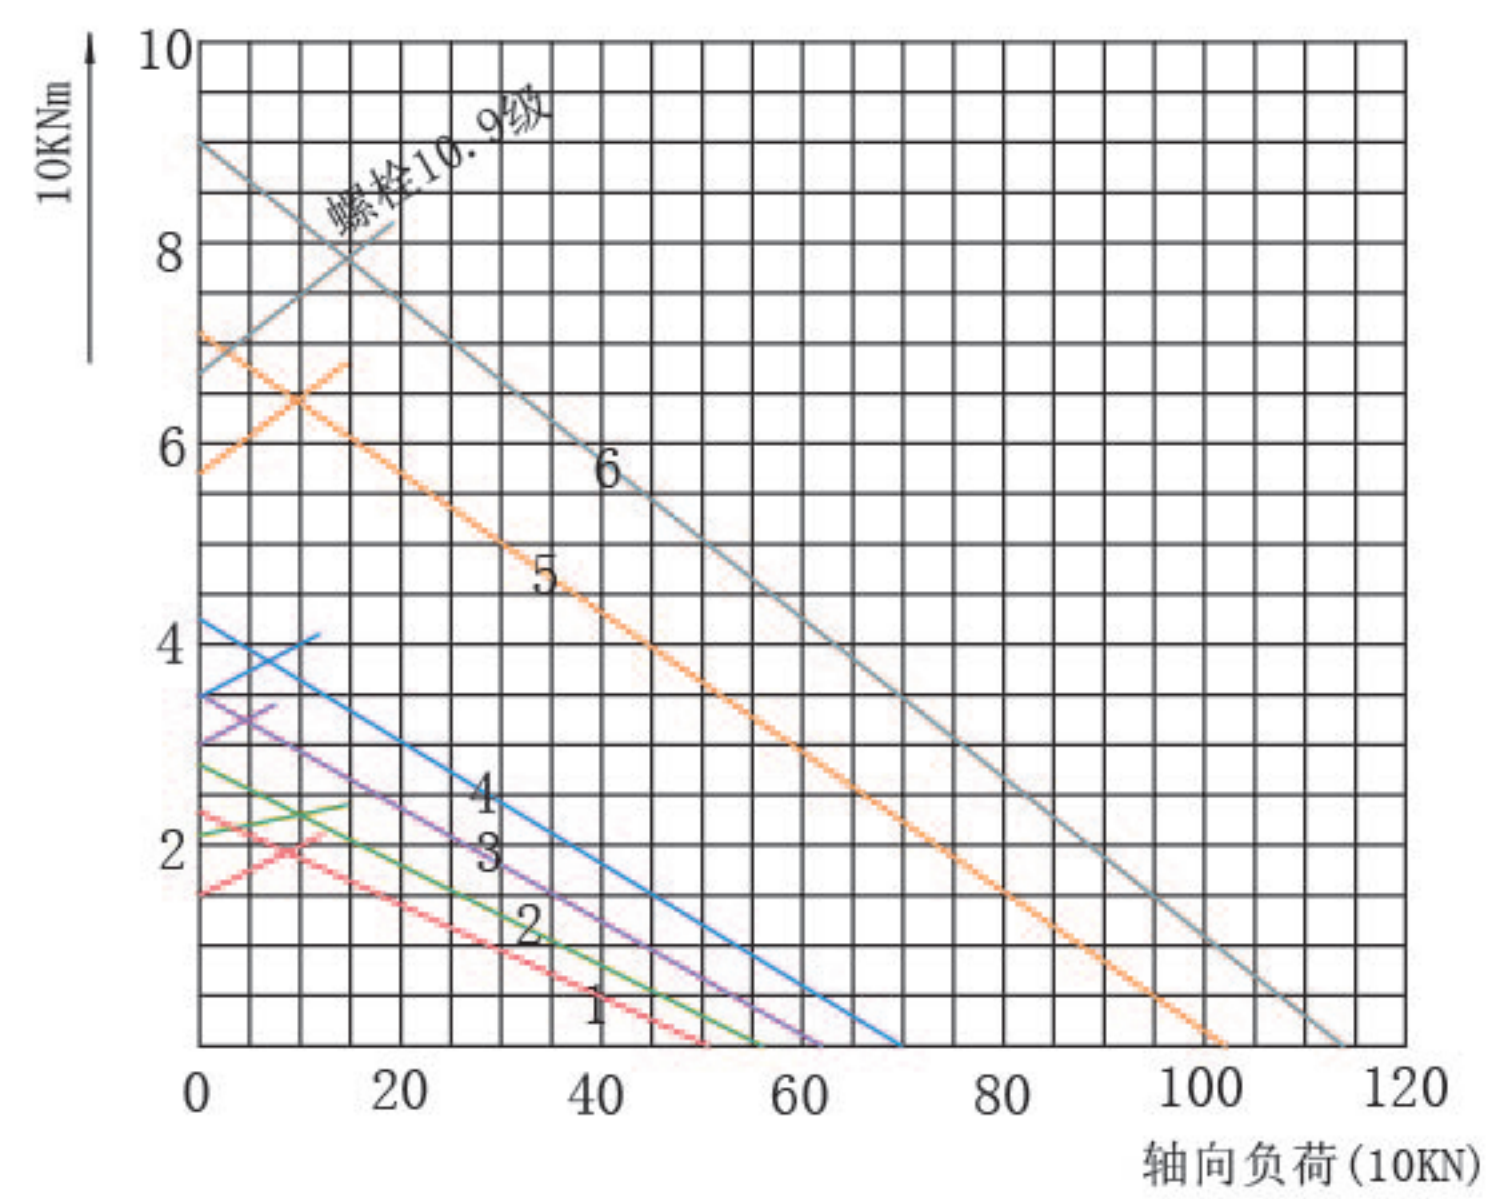




单排四点接触球式回转支承（01 系列）
Single-row four point contact ball type slewing bearing

		外形尺寸			安装孔尺寸						结构尺寸					齿轮参数		外齿参数		内齿参数	
代号	曲线	D (mm)	d (mm)	H (mm)	D ₁ (mm)	D ₂ (mm)	d _{n1} d _{n2} (mm)	d _{a1} d _{a2} (mm)	L (mm)	n	n ₁	D ₃ (mm)	d ₁ (mm)	H ₁ (mm)	h (mm)	b (mm)	m (mm)	d _a (mm)	z	d _a (mm)	z
01.20.200	1	280	120	60	248	152	16	M14	28	12	2	201	199	50	10	40	3	300	98	—	—
01.20.224	2	304	144	60	272	176	16	M14	28	12	2	225	223	50	10	40	3	321	105	—	—
01.20.250	3	330	170	60	298	202	16	M14	28	18	2	251	249	50	10	40	4	352	86	—	—
01.20.280	4	360	200	60	328	232	16	M14	28	18	2	281	279	50	10	40	4	384	94	—	—
01.25.315	5	408	222	70	372	258	18	M16	32	20	2	316	314	60	10	50	5	435	85	190	40
01.25.355	6	448	262	70	412	298	18	M16	32	20	2	356	354	60	10	50	5	475	93	235	49

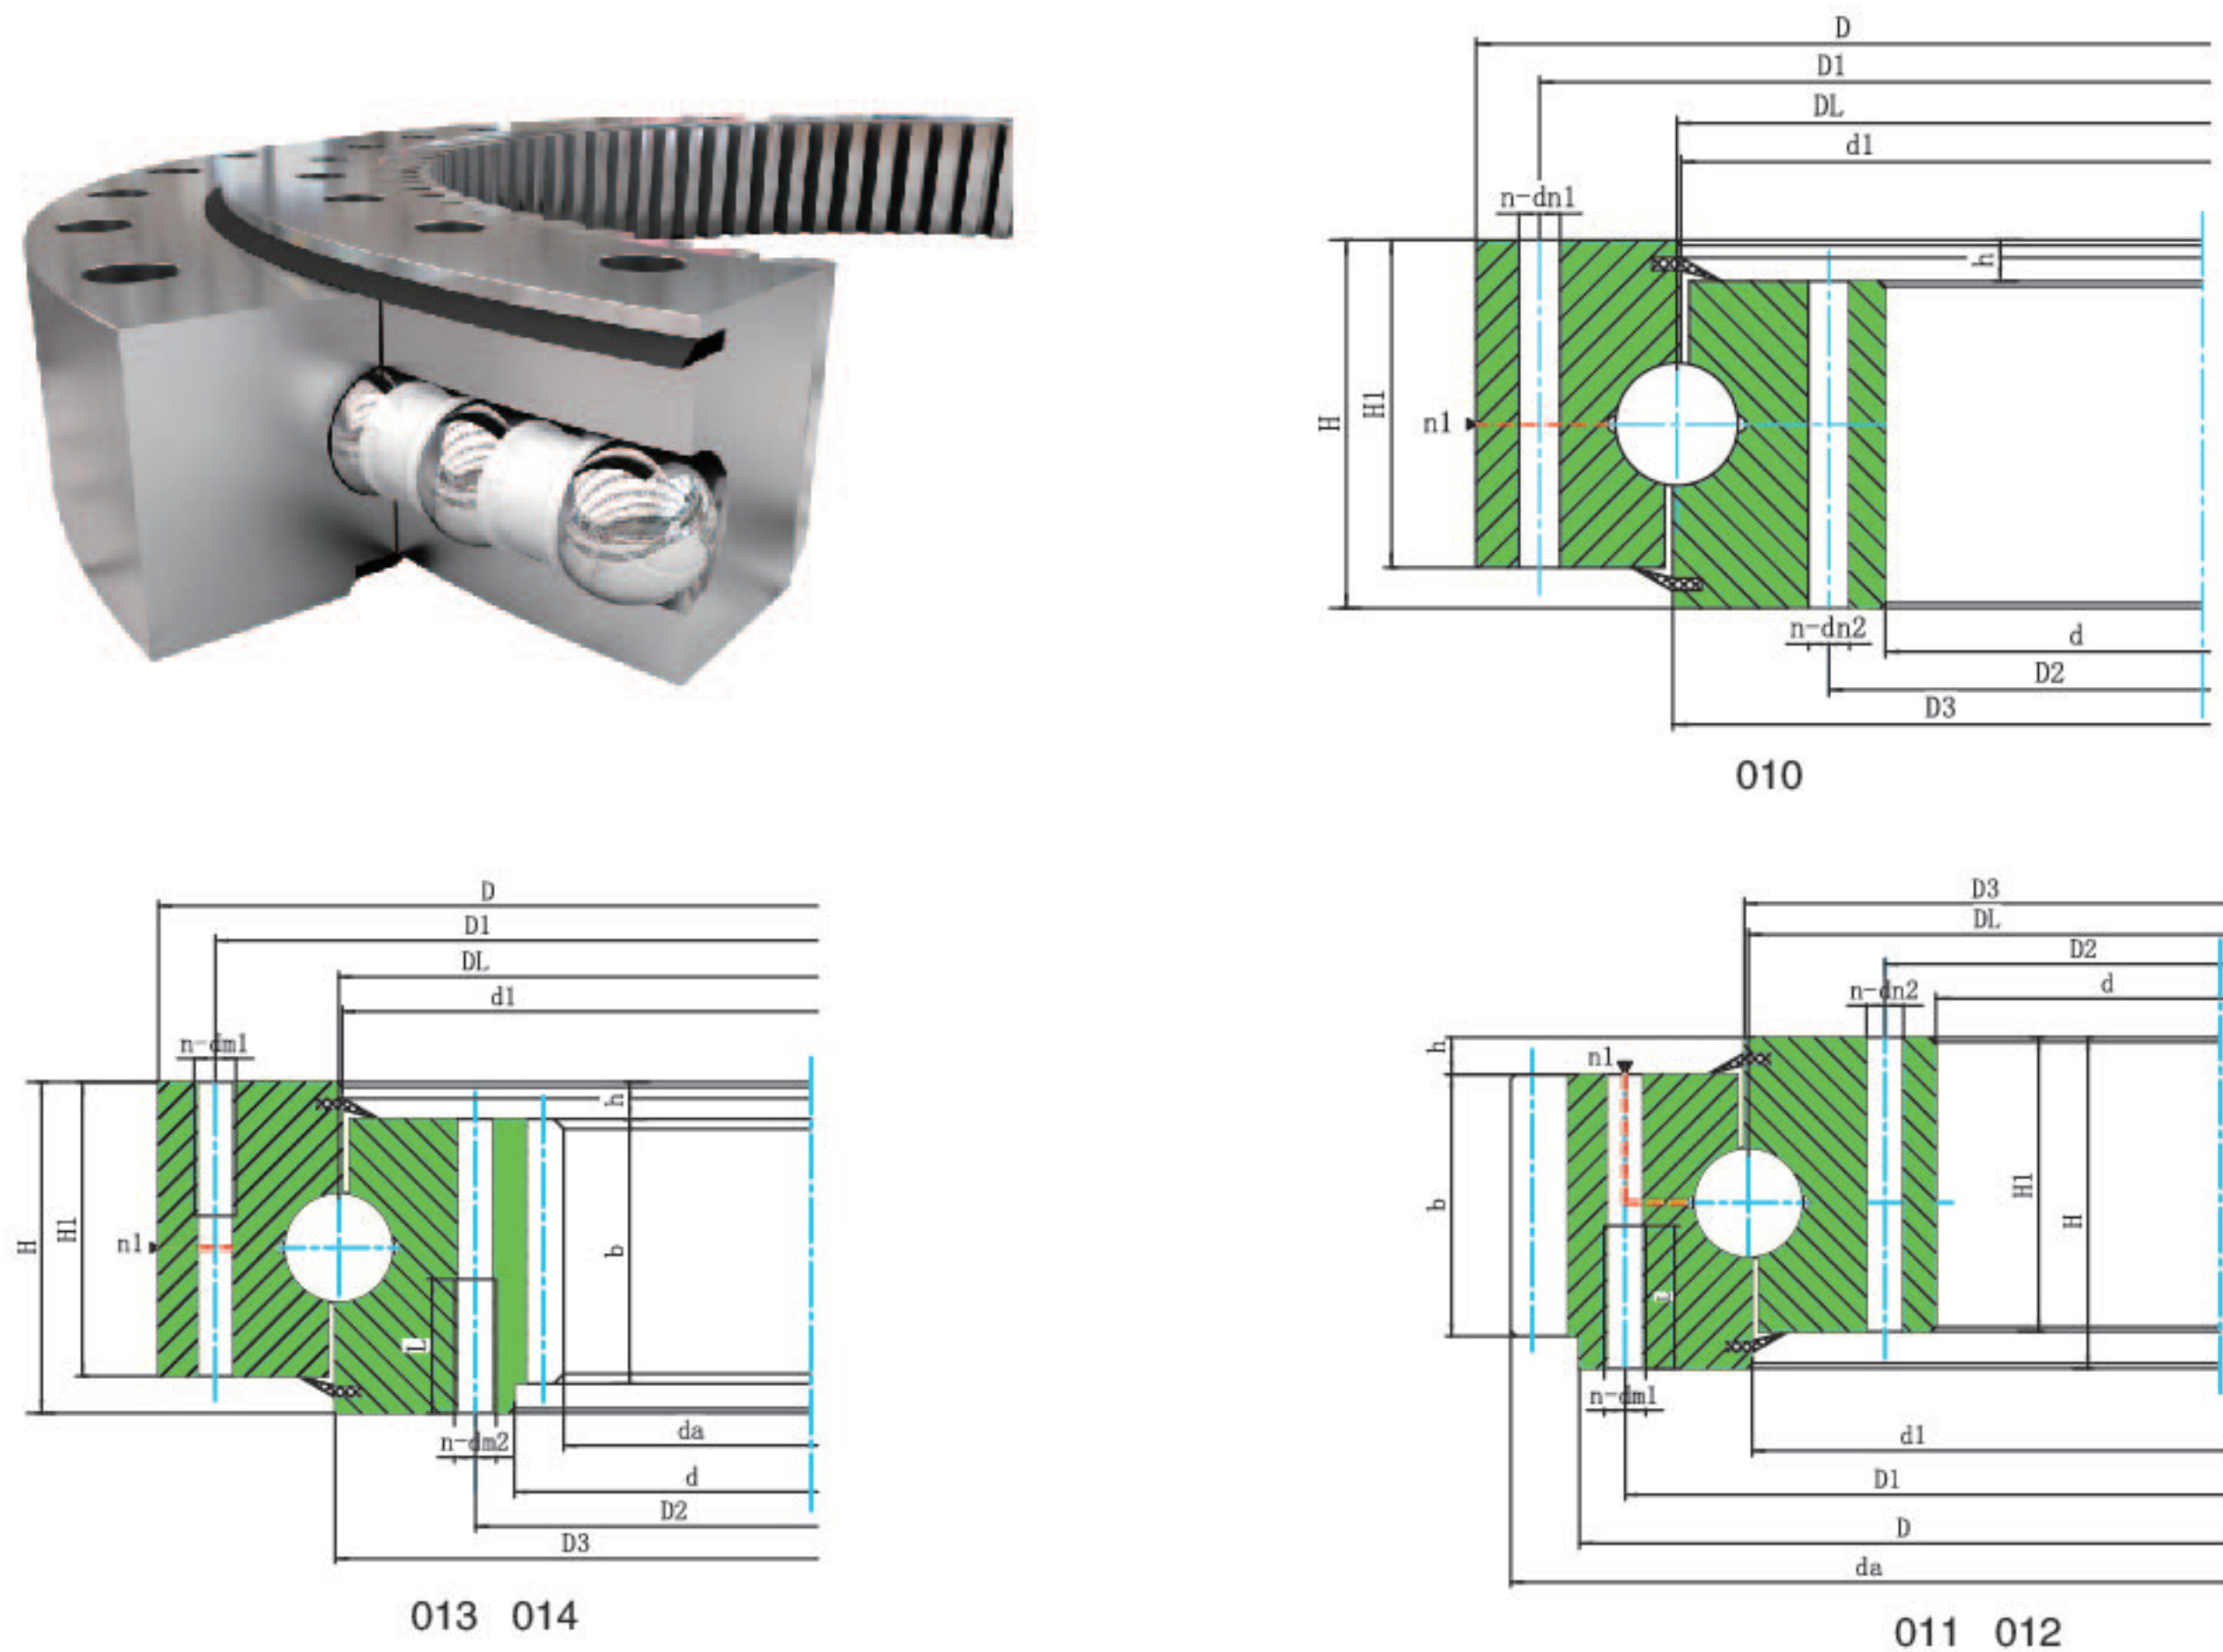



单排四点接触球式回转支承（01 系列）
Single-row four point contact ball type slewing bearing

		外形尺寸			安装孔尺寸						结构尺寸					齿轮参数		外齿参数		内齿参数	
代号	曲线	D (mm)	d (mm)	H (mm)	D ₁ (mm)	D ₂ (mm)	d _{n1} d _{n2} (mm)	d _{m1} d _{m2} (mm)	L (mm)	n	n ₁	D ₃ (mm)	d ₁ (mm)	H ₁ (mm)	h (mm)	b (mm)	m (mm)	d _a (mm)	z	d _a (mm)	z
01.25.400	7	493	307	70	457	343	18	M16	32	20	2	401	399	60	10	50	6	528	86	276	48
01.25.450	8	543	357	70	507	393	18	M16	32	20	2	451	449	60	10	50	6	576	94	324	56
01.30.500	9	602	398	80	566	434	18	M16	32	20	4	501	498	70	10	60	5 6	629 628.8	123 102	367 368.4	74 62
01.25.500	10	602	398	80	566	434	18	M16	32	20	4	501	499	70	10	60	5 6	629 628.8	123 102	367 368.4	74 62
01.30.560	11	662	458	80	626	494	18	M16	32	20	4	561	558	70	10	60	5 6	689 688.8	135 112	427 428.4	86 72
01.25.560	12	662	458	80	626	494	18	M16	32	20	4	561	559	70	10	60	5 6	689 688.8	135 112	427 428.4	86 72

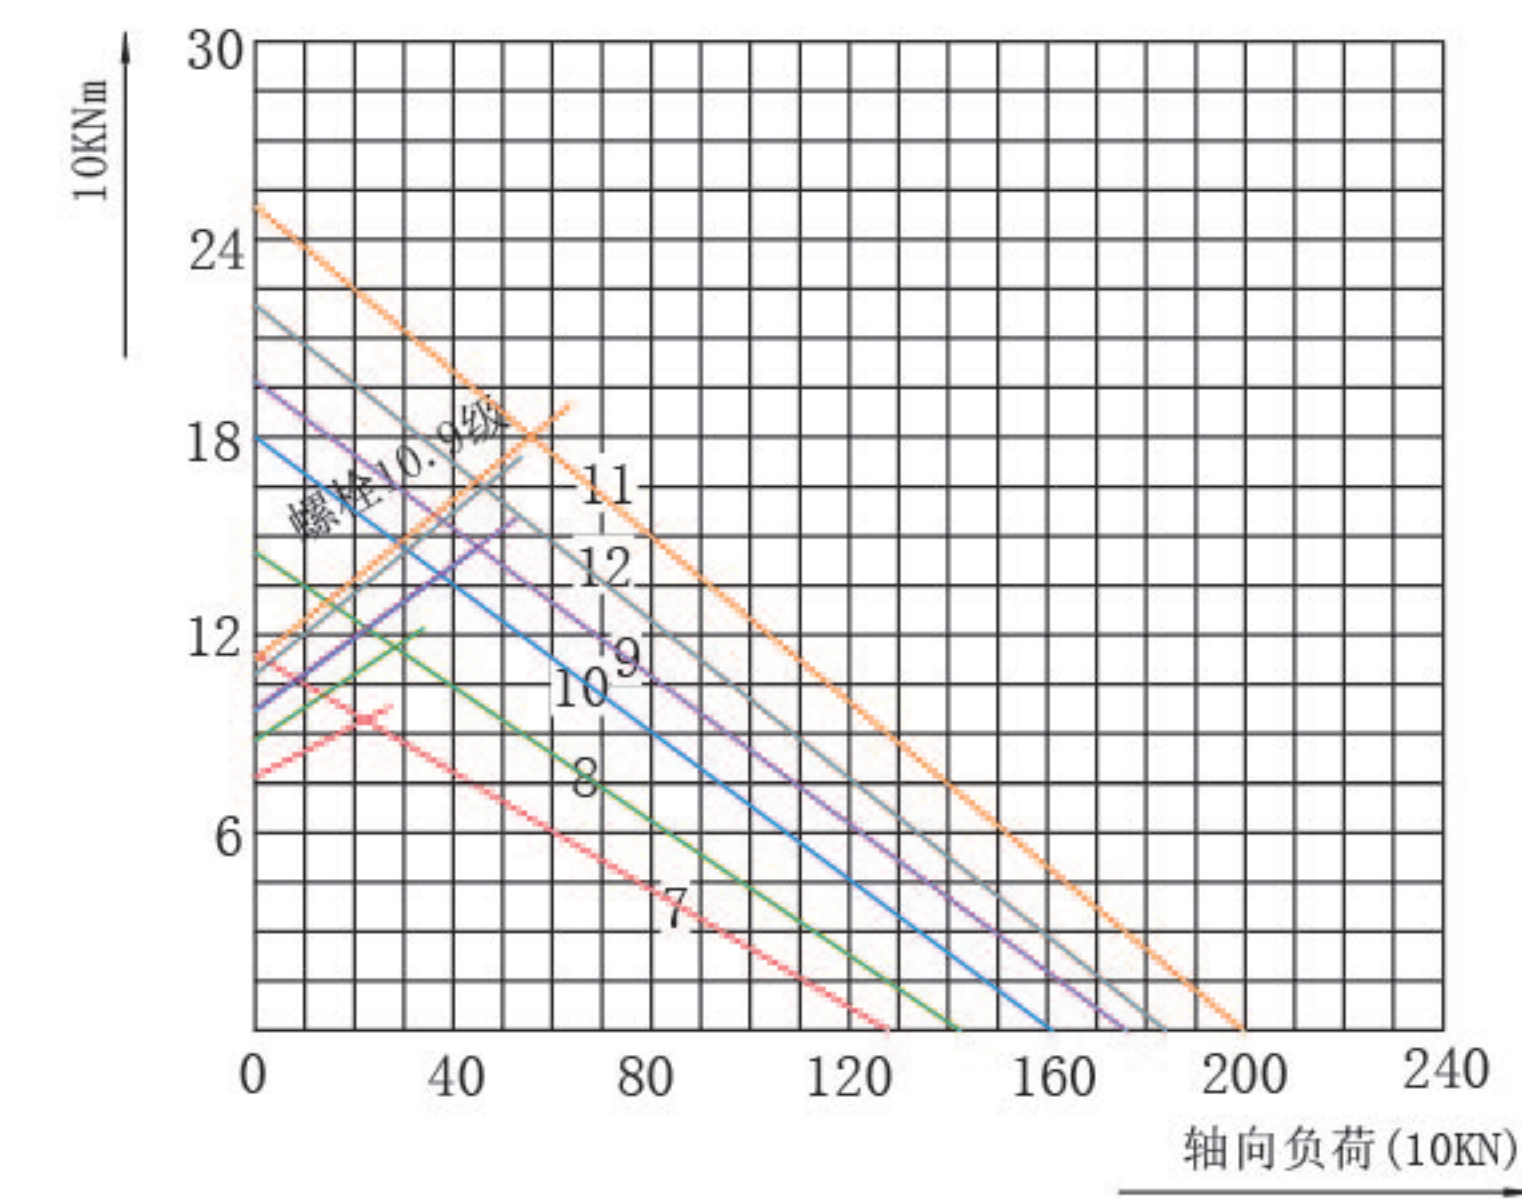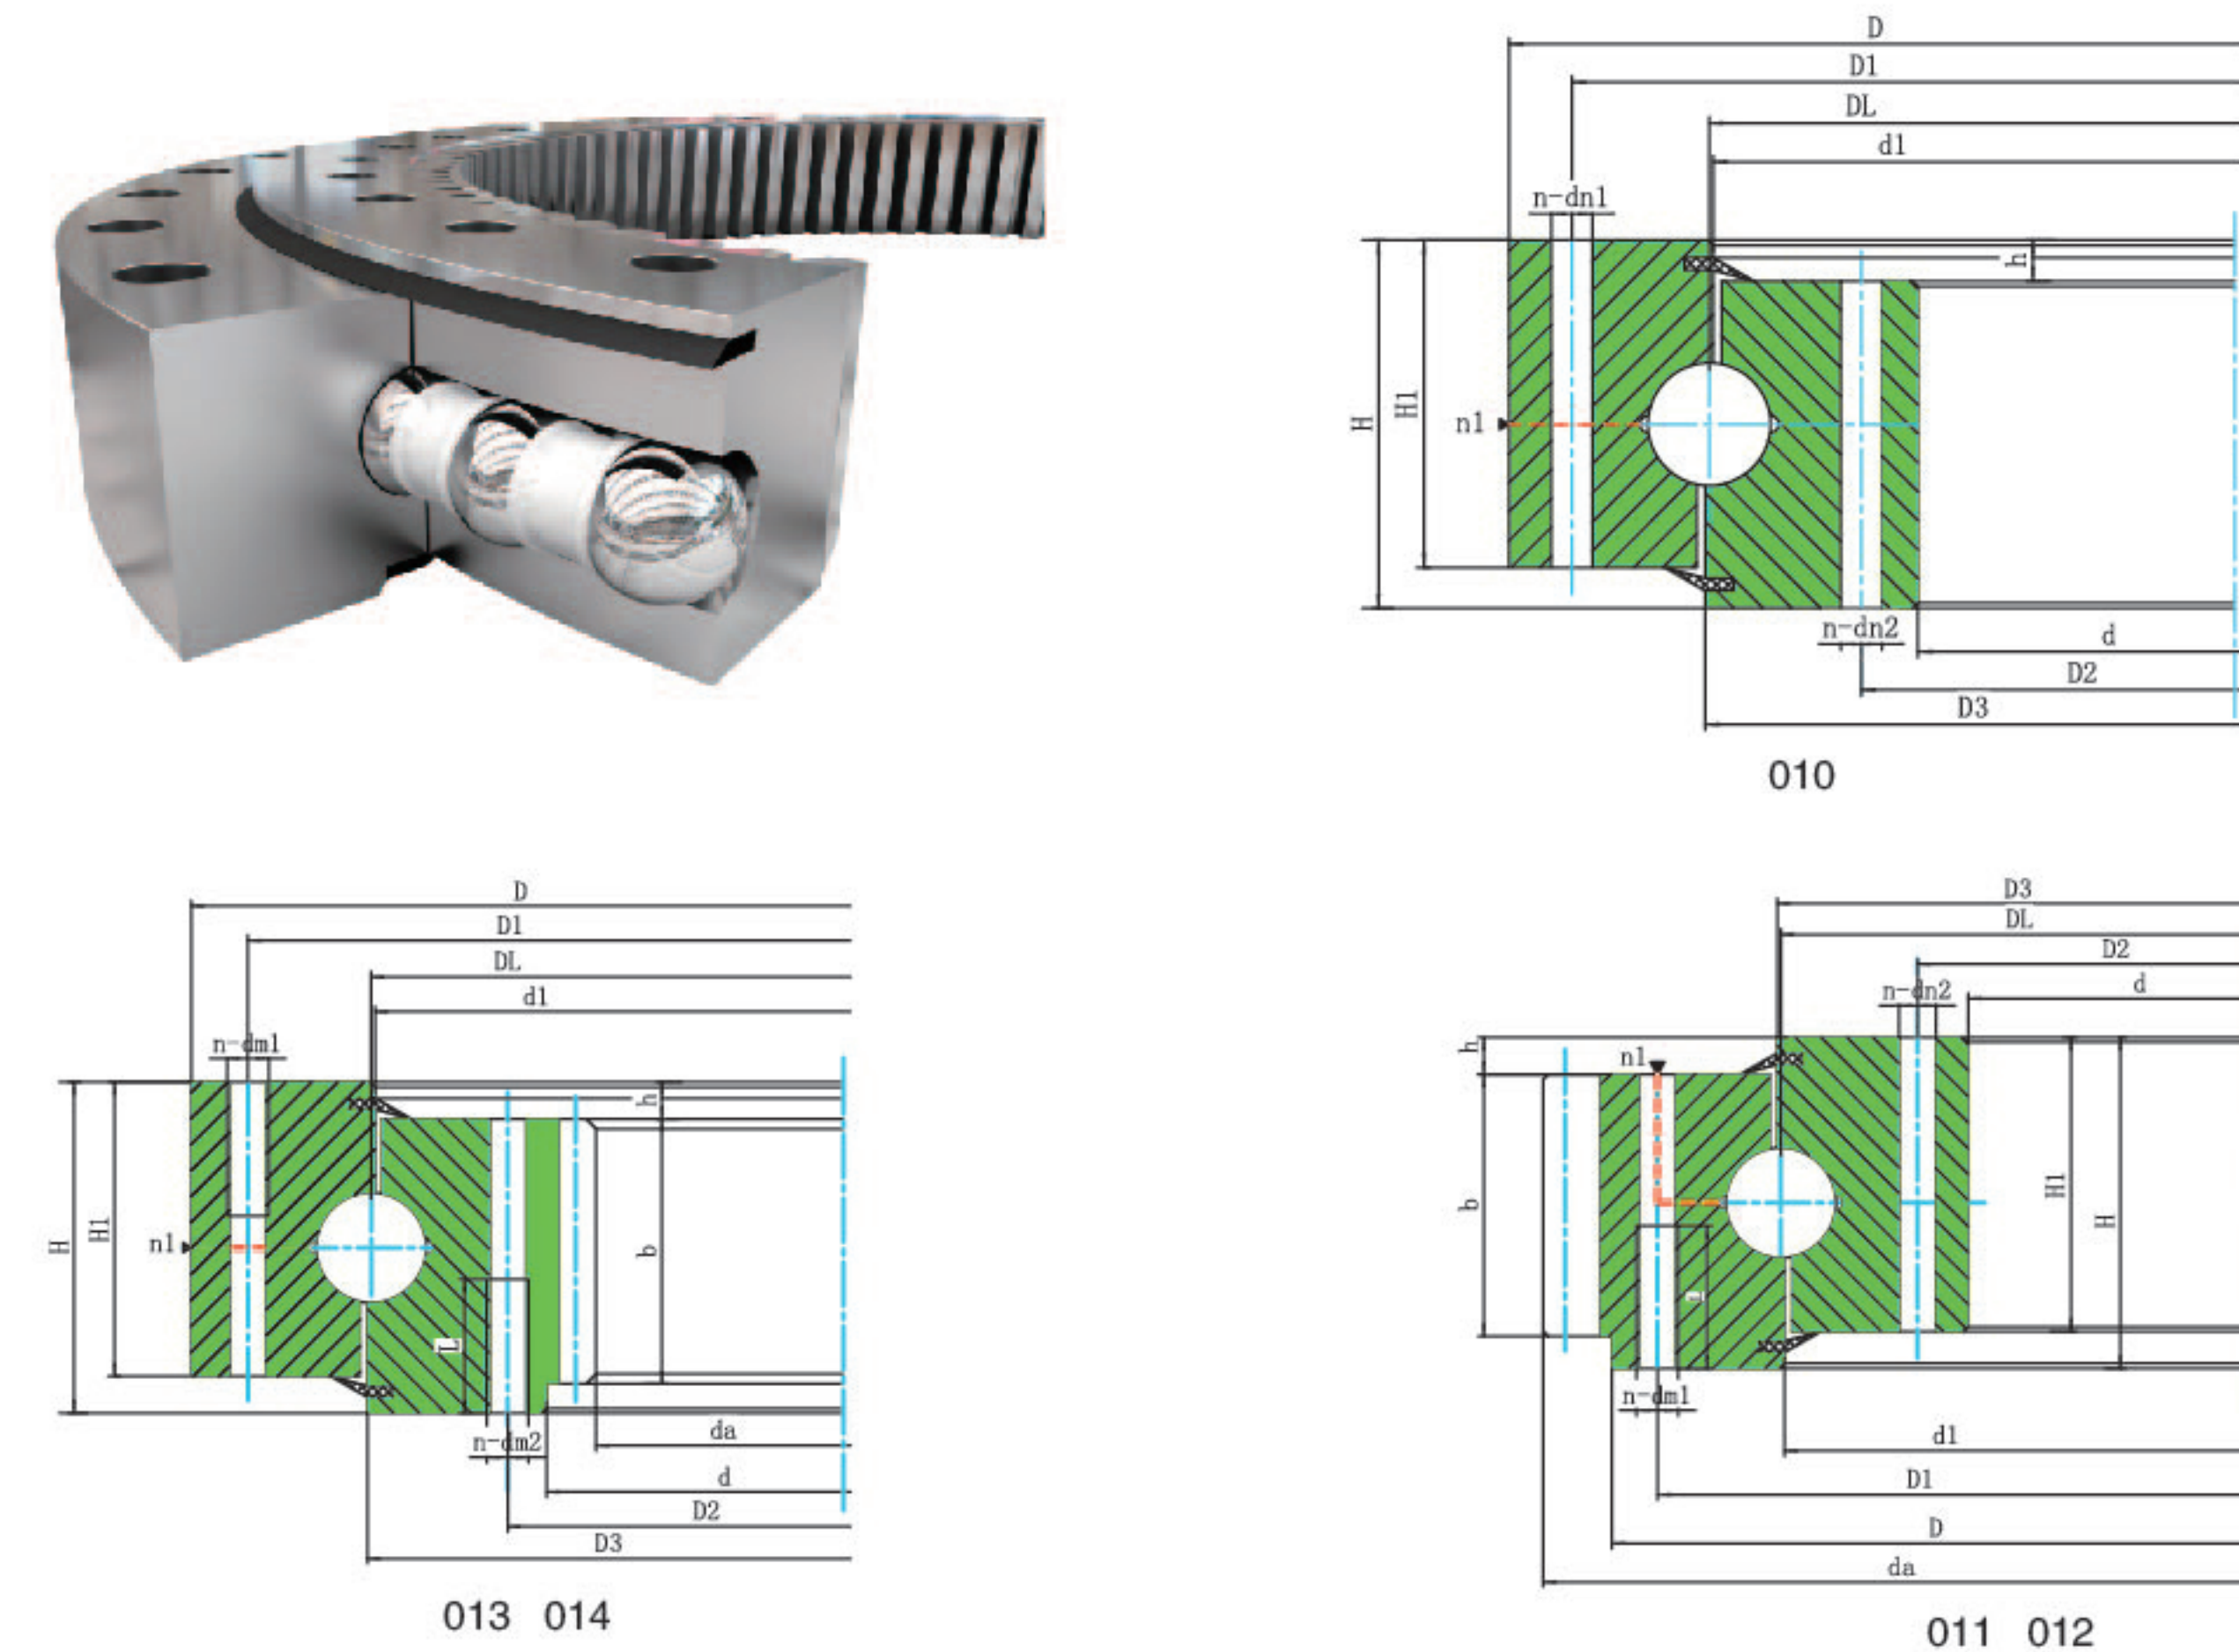



单排四点接触球式回转支承 (01 系列)
Single-row four point contact ball type slewing bearing

		外形尺寸			安装孔尺寸						结构尺寸					齿轮参数		外齿参数		内齿参数	
代号	曲线	D (mm)	d (mm)	H (mm)	D ₁ (mm)	D ₂ (mm)	d _{n1} d _{n2} (mm)	d _{m1} d _{m2} (mm)	L (mm)	n	n ₁	D ₃ (mm)	d ₁ (mm)	H ₁ (mm)	h (mm)	b (mm)	m (mm)	d _a (mm)	z	d _a (mm)	z
01.30.630	13	732	528	80	696	564	18	M16	32	24	4	631	628	70	10	60	$\frac{6}{8}$	$\frac{772.8}{774.4}$	$\frac{126}{94}$	$\frac{494.4}{491.2}$	$\frac{83}{62}$
01.25.630	14	732	528	80	696	564	18	M16	32	24	4	631	629	70	10	60	$\frac{6}{8}$	$\frac{772.8}{774.4}$	$\frac{126}{94}$	$\frac{494.4}{491.2}$	$\frac{83}{62}$
01.30.710	15	812	608	80	776	644	18	M16	32	24	4	711	708	70	10	60	$\frac{6}{8}$	$\frac{850.8}{854.4}$	$\frac{139}{104}$	$\frac{572.4}{571.2}$	$\frac{96}{72}$
01.25.710	16	812	608	80	776	644	18	M16	32	24	4	711	709	70	10	60	$\frac{6}{8}$	$\frac{850.8}{854.4}$	$\frac{139}{104}$	$\frac{572.4}{571.2}$	$\frac{96}{72}$
01.40.800	17	922	678	100	878	722	22	M20	40	30	6	801	798	90	10	80	$\frac{8}{10}$	$\frac{966.4}{968}$	$\frac{118}{94}$	$\frac{635.2}{634}$	$\frac{80}{64}$
01.30.800	18	922	678	100	878	722	22	M20	40	30	6	801	798	90	10	80	$\frac{8}{10}$	$\frac{966.4}{968}$	$\frac{118}{94}$	$\frac{635.2}{634}$	$\frac{80}{64}$

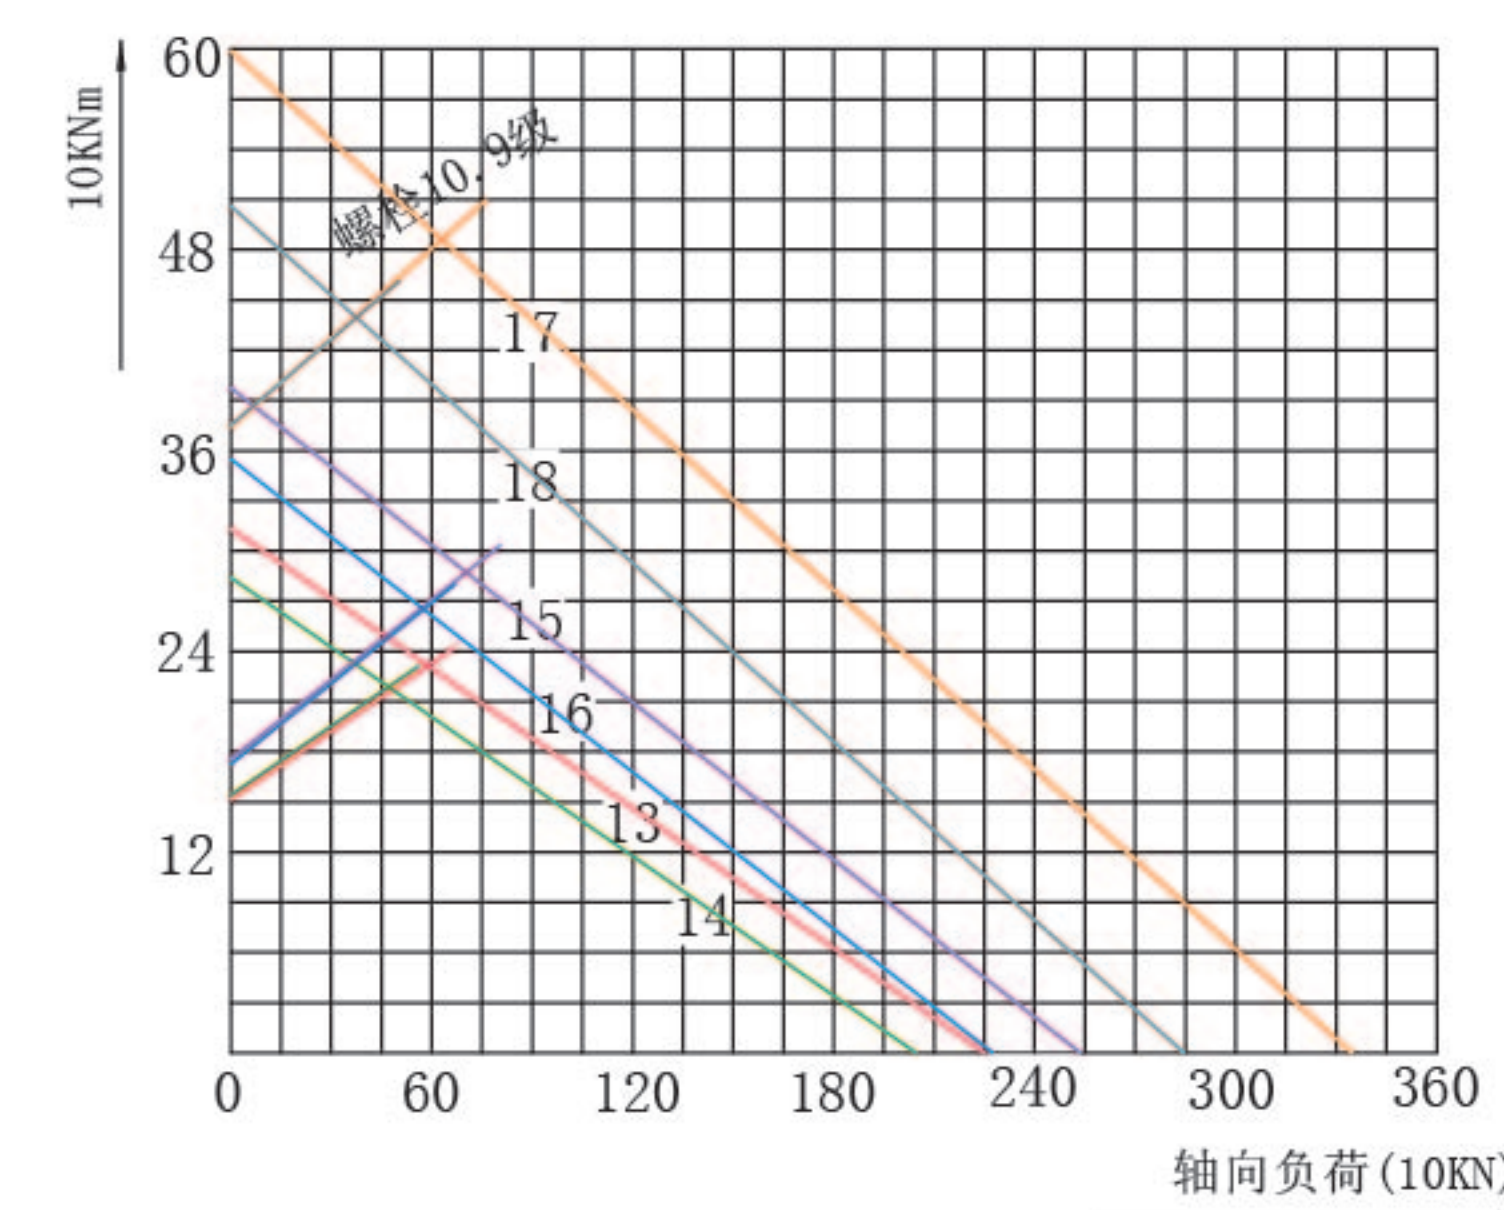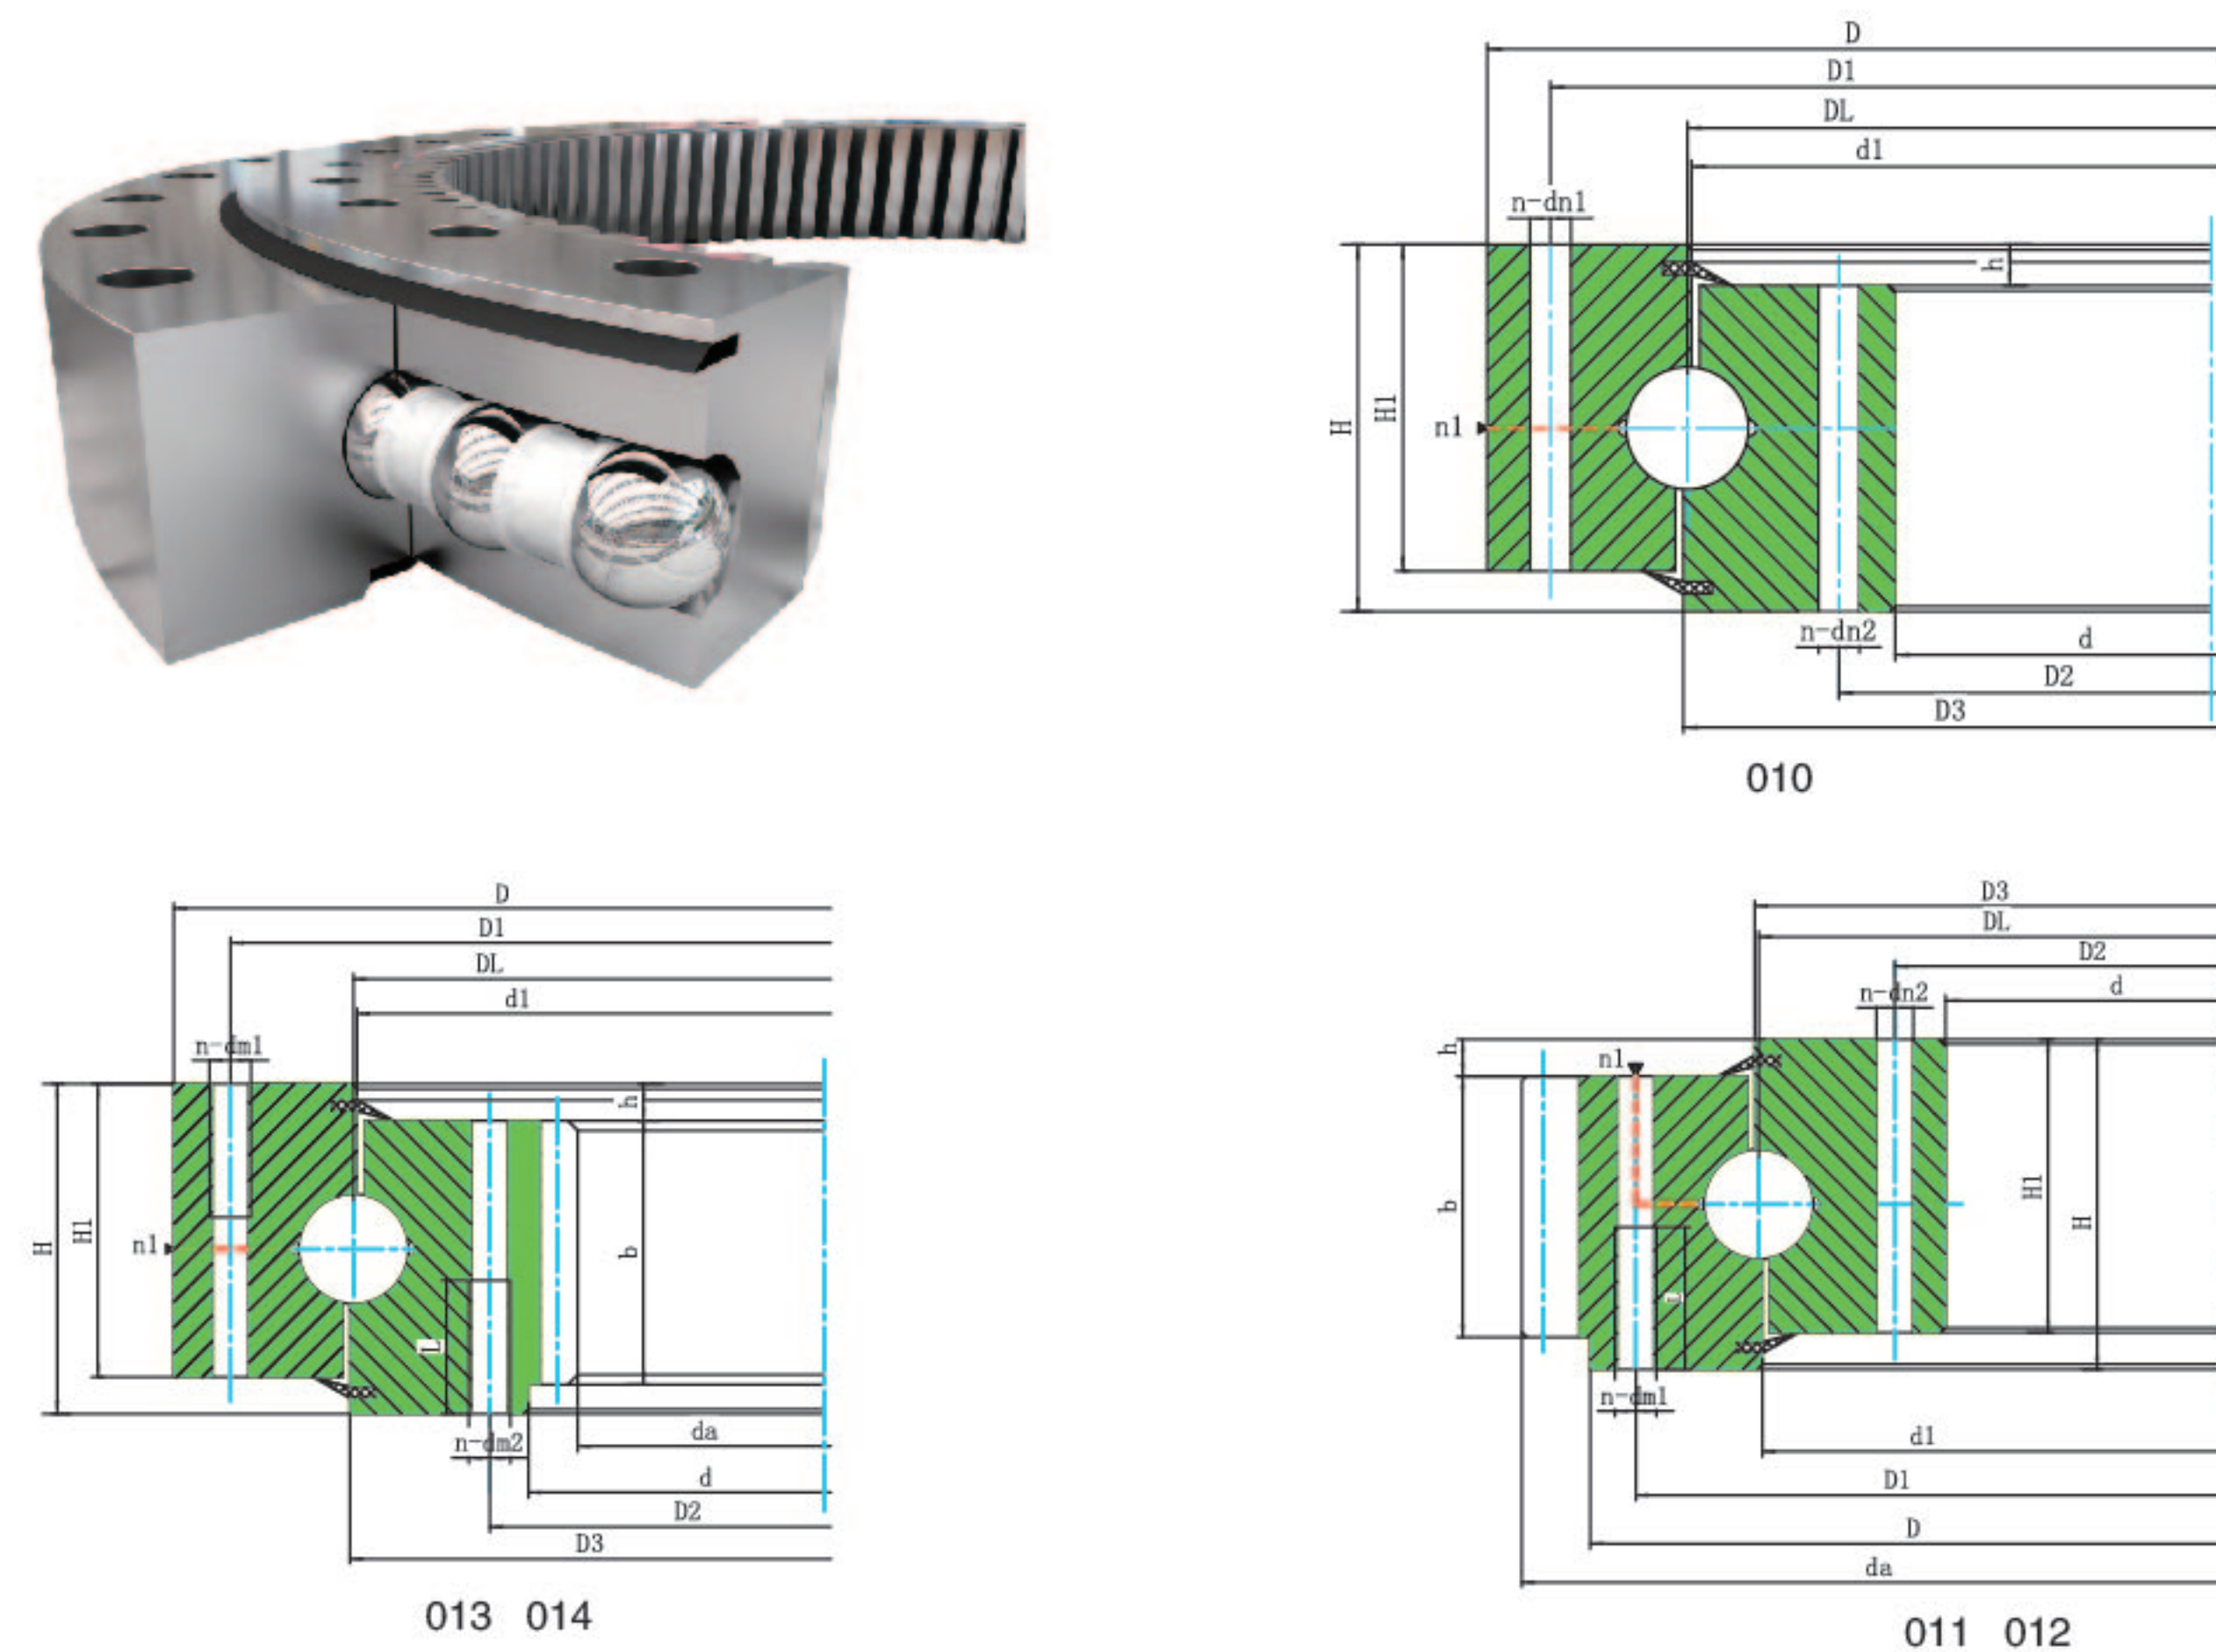



单排四点接触球式回转支承 (01 系列)
Single-row four point contact ball type slewing bearing

		外形尺寸			安装孔尺寸						结构尺寸					齿轮参数		外齿参数		内齿参数	
代号	曲线	D (mm)	d (mm)	H (mm)	D ₁ (mm)	D ₂ (mm)	d _{n1} d _{n2} (mm)	d _{m1} d _{m2} (mm)	L (mm)	n	n ₁	D ₃ (mm)	d ₁ (mm)	H ₁ (mm)	h (mm)	b (mm)	m (mm)	d _a (mm)	z	d _a (mm)	z
01.40.900	19	1022	778	100	978	822	22	M20	40	30	6	901	898	90	10	80	$\frac{8}{10}$	1062.4 1068	130 104	739.2 734	93 74
01.30.900	20	1022	778	100	978	822	22	M20	40	30	6	901	898	90	10	80	$\frac{8}{10}$	1062.4 1068	130 104	739.2 734	93 74
01.40.1000	21	1122	878	100	1078	922	22	M20	40	36	6	1001	998	90	10	80	$\frac{10}{12}$	1188 1185.6	116 96	824 820.8	83 69
01.30.1000	22	1122	878	100	1078	922	22	M20	40	36	6	1001	998	90	10	80	$\frac{10}{12}$	1188 1185.6	116 96	824 820.8	83 69
01.40.1120	23	1242	998	100	1198	1042	22	M20	40	36	6	1121	1118	90	10	80	$\frac{10}{12}$	1298 1305.6	127 106	944 940.8	95 79
01.30.1120	24	1242	998	100	1198	1042	22	M20	40	36	6	1121	1118	90	10	80	$\frac{10}{12}$	1298 1305.6	127 106	944 940.8	95 79

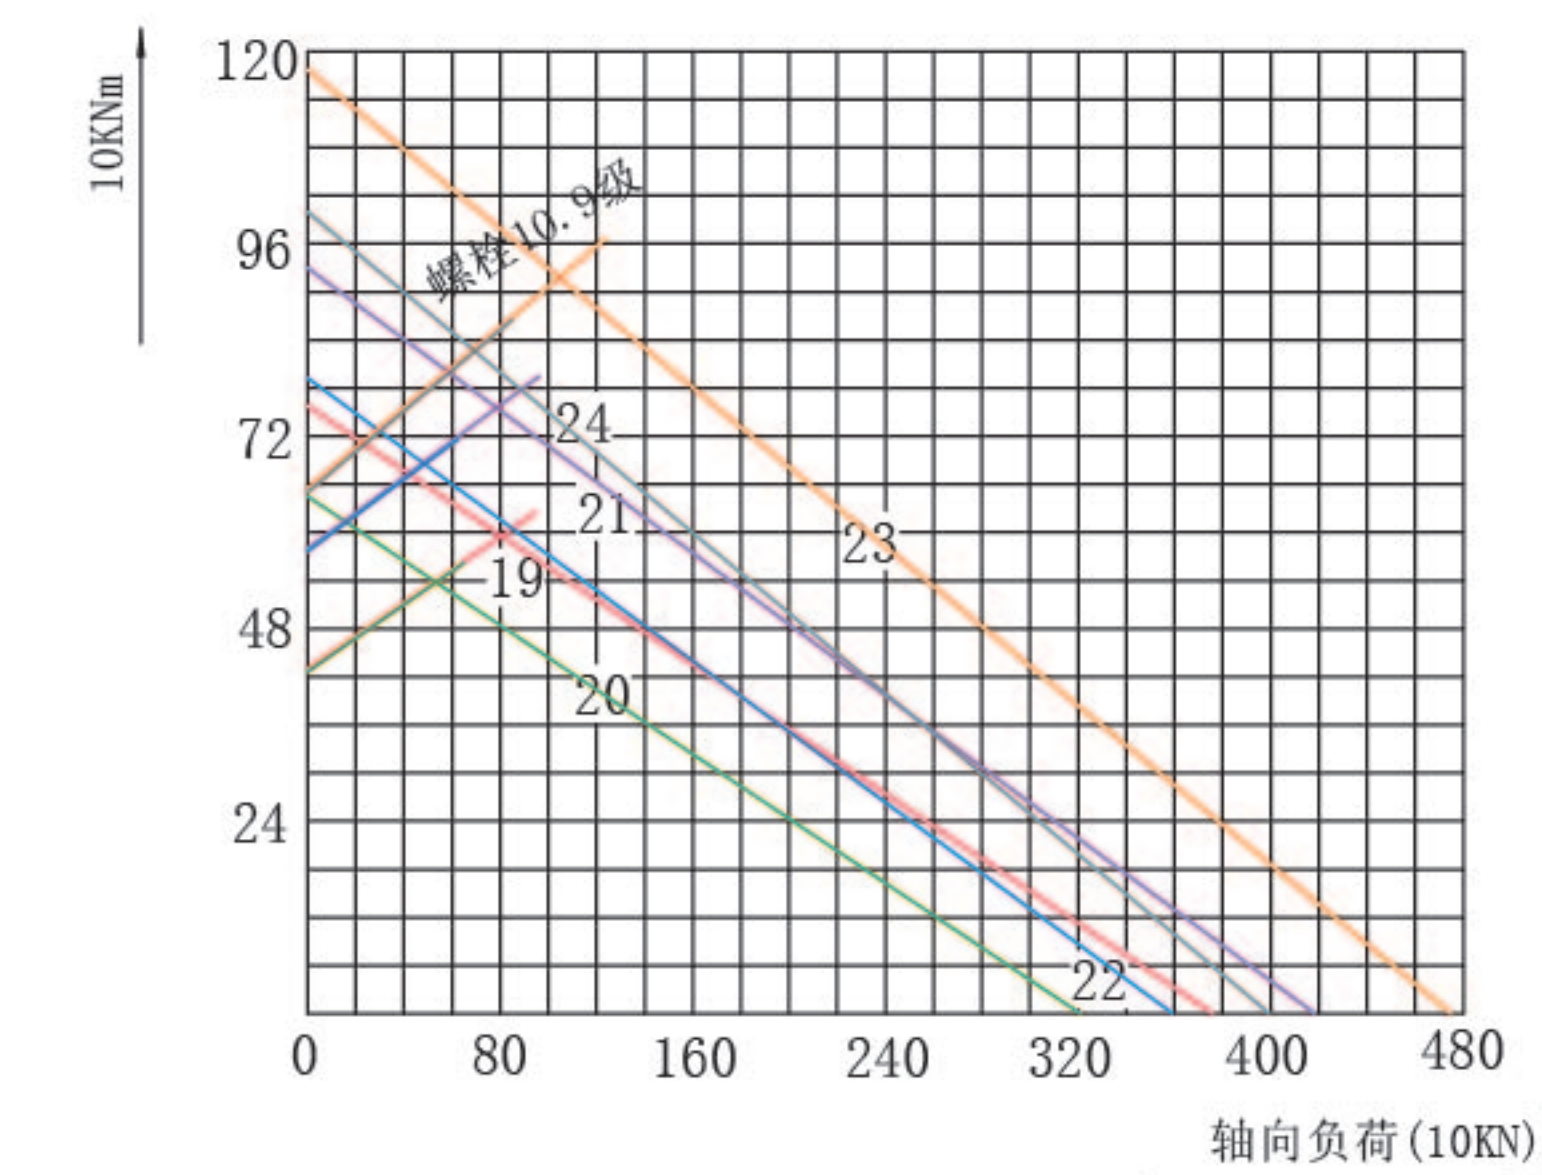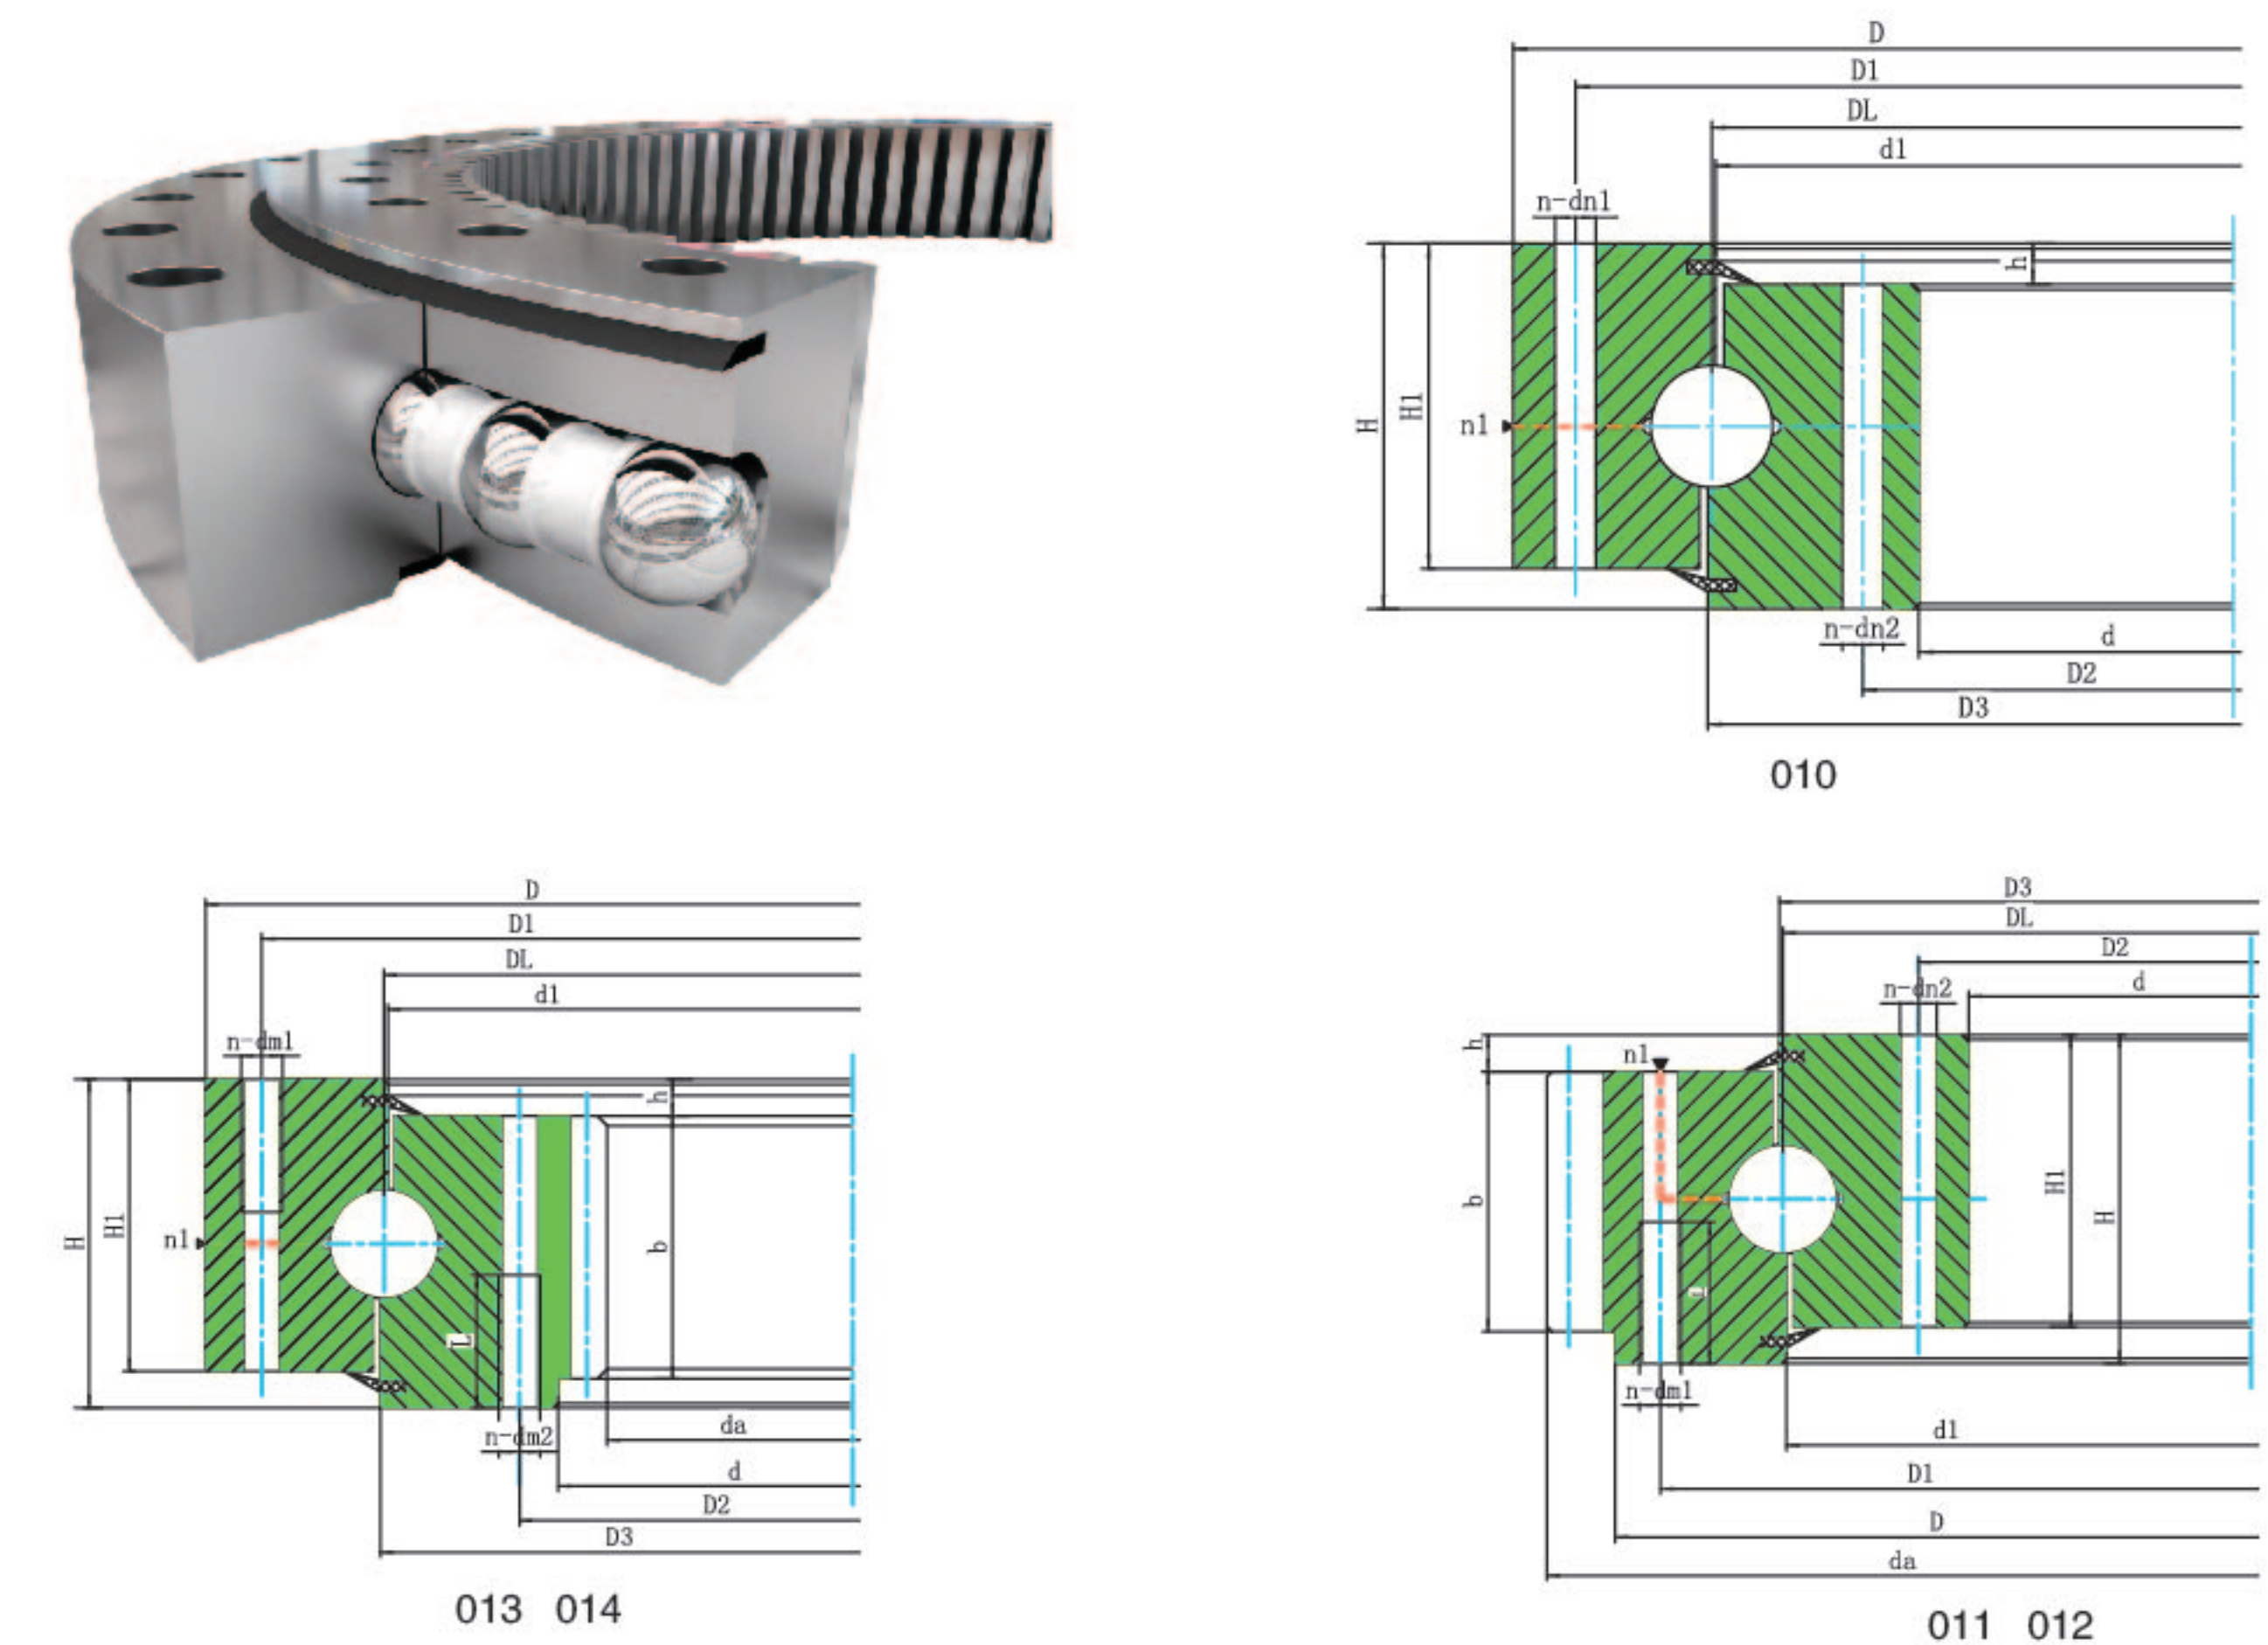



单排四点接触球式回转支承（01 系列）
Single-row four point contact ball type slewing bearing

		外形尺寸			安装孔尺寸						结构尺寸					齿轮参数		外齿参数		内齿参数	
代号	曲线	D (mm)	d (mm)	H (mm)	D ₁ (mm)	D ₂ (mm)	d _{n1} d _{n2} (mm)	d _{m1} d _{m2} (mm)	L (mm)	n	n ₁	D ₃ (mm)	d ₁ (mm)	H ₁ (mm)	h (mm)	b (mm)	m (mm)	d _a (mm)	z	d _a (mm)	z
01.45.1250	25	1390	1110	110	1337	1163	26	M24	48	40	5	1252	1248	100	10	90	12 14	1449.6 1453.2	118 101	1048.8 1041.6	88 75
01.35.1250	26	1390	1110	110	1337	1163	26	M24	48	40	5	1251	1248	100	10	90	12 14	1449.6 1453.2	118 101	1048.8 1041.6	88 75
01.45.1400	27	1540	1260	110	1487	1313	26	M24	48	40	5	1402	1398	100	10	90	12 14	1605.6 1607.2	131 112	1192.8 1195.6	100 86
01.35.1400	28	1540	1260	110	1487	1313	26	M24	48	40	5	1401	1398	100	10	90	12 14	1605.6 1607.2	131 112	1192.8 1195.6	100 86
01.45.1600	29	1740	1460	110	1687	1513	26	M24	48	45	5	1602	1598	100	10	90	14 16	1817.2 1820.8	127 111	1391.6 1382.4	100 87
01.35.1600	30	1740	1460	110	1687	1513	26	M24	48	45	5	1601	1598	100	10	90	14 16	1817.2 1820.8	127 111	1391.6 1382.4	100 87

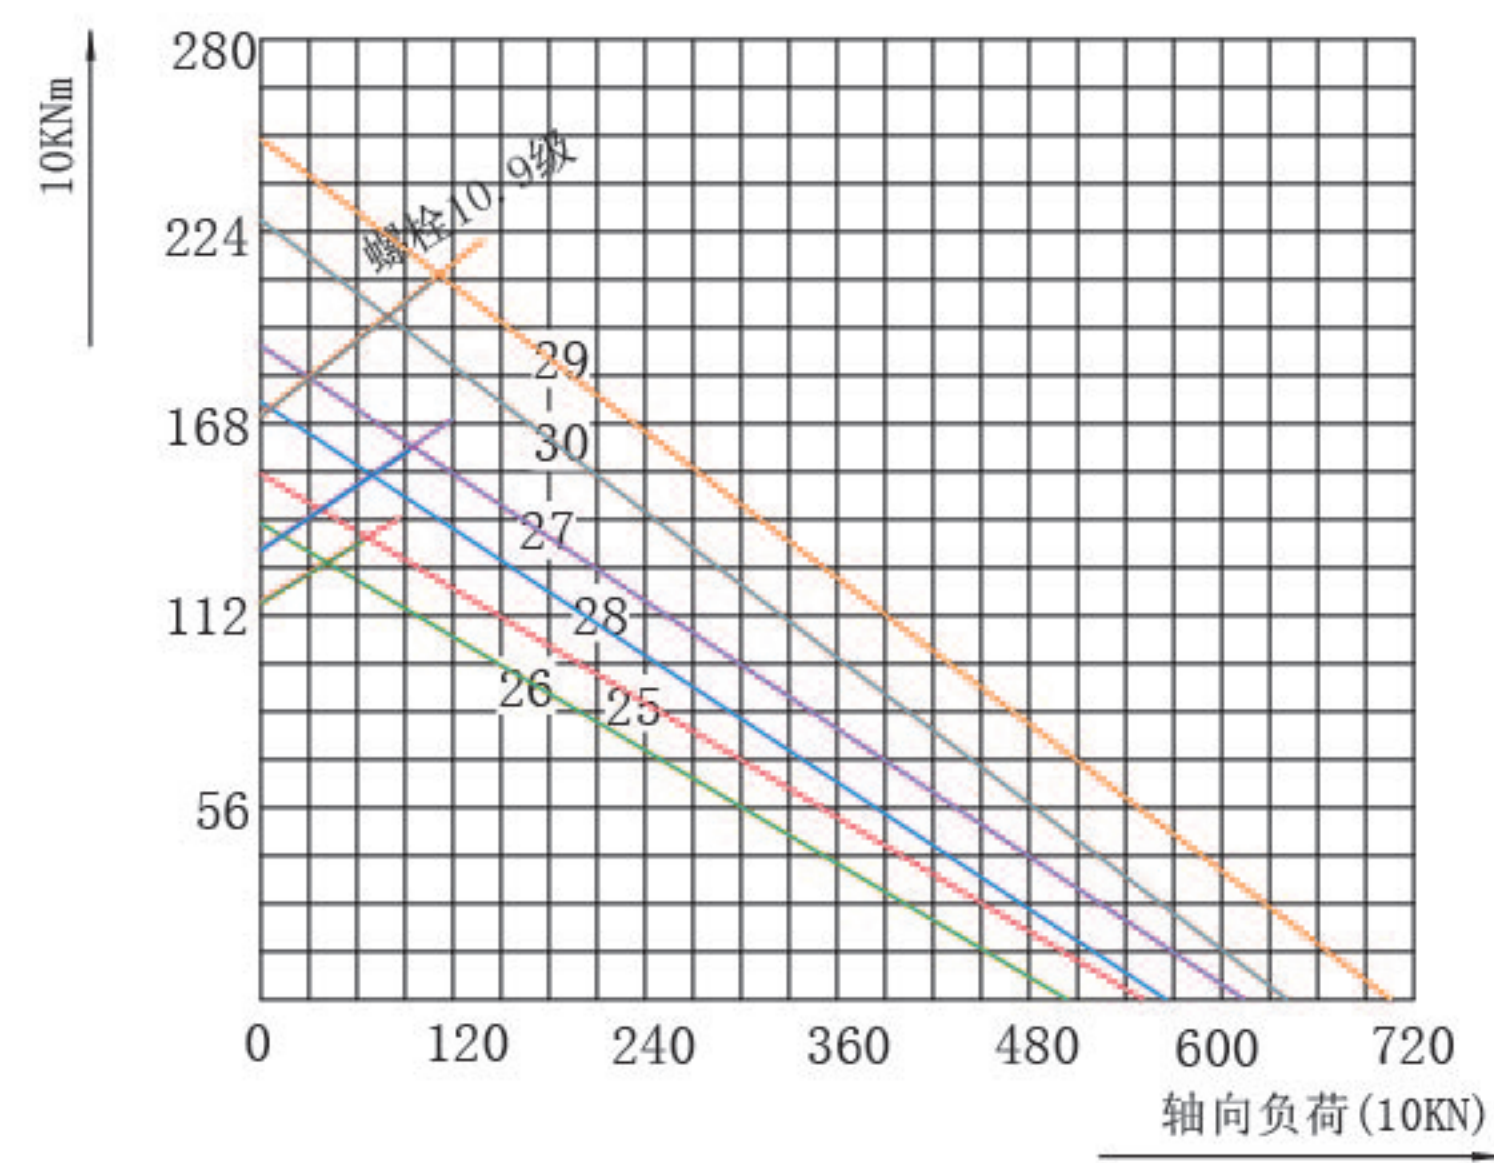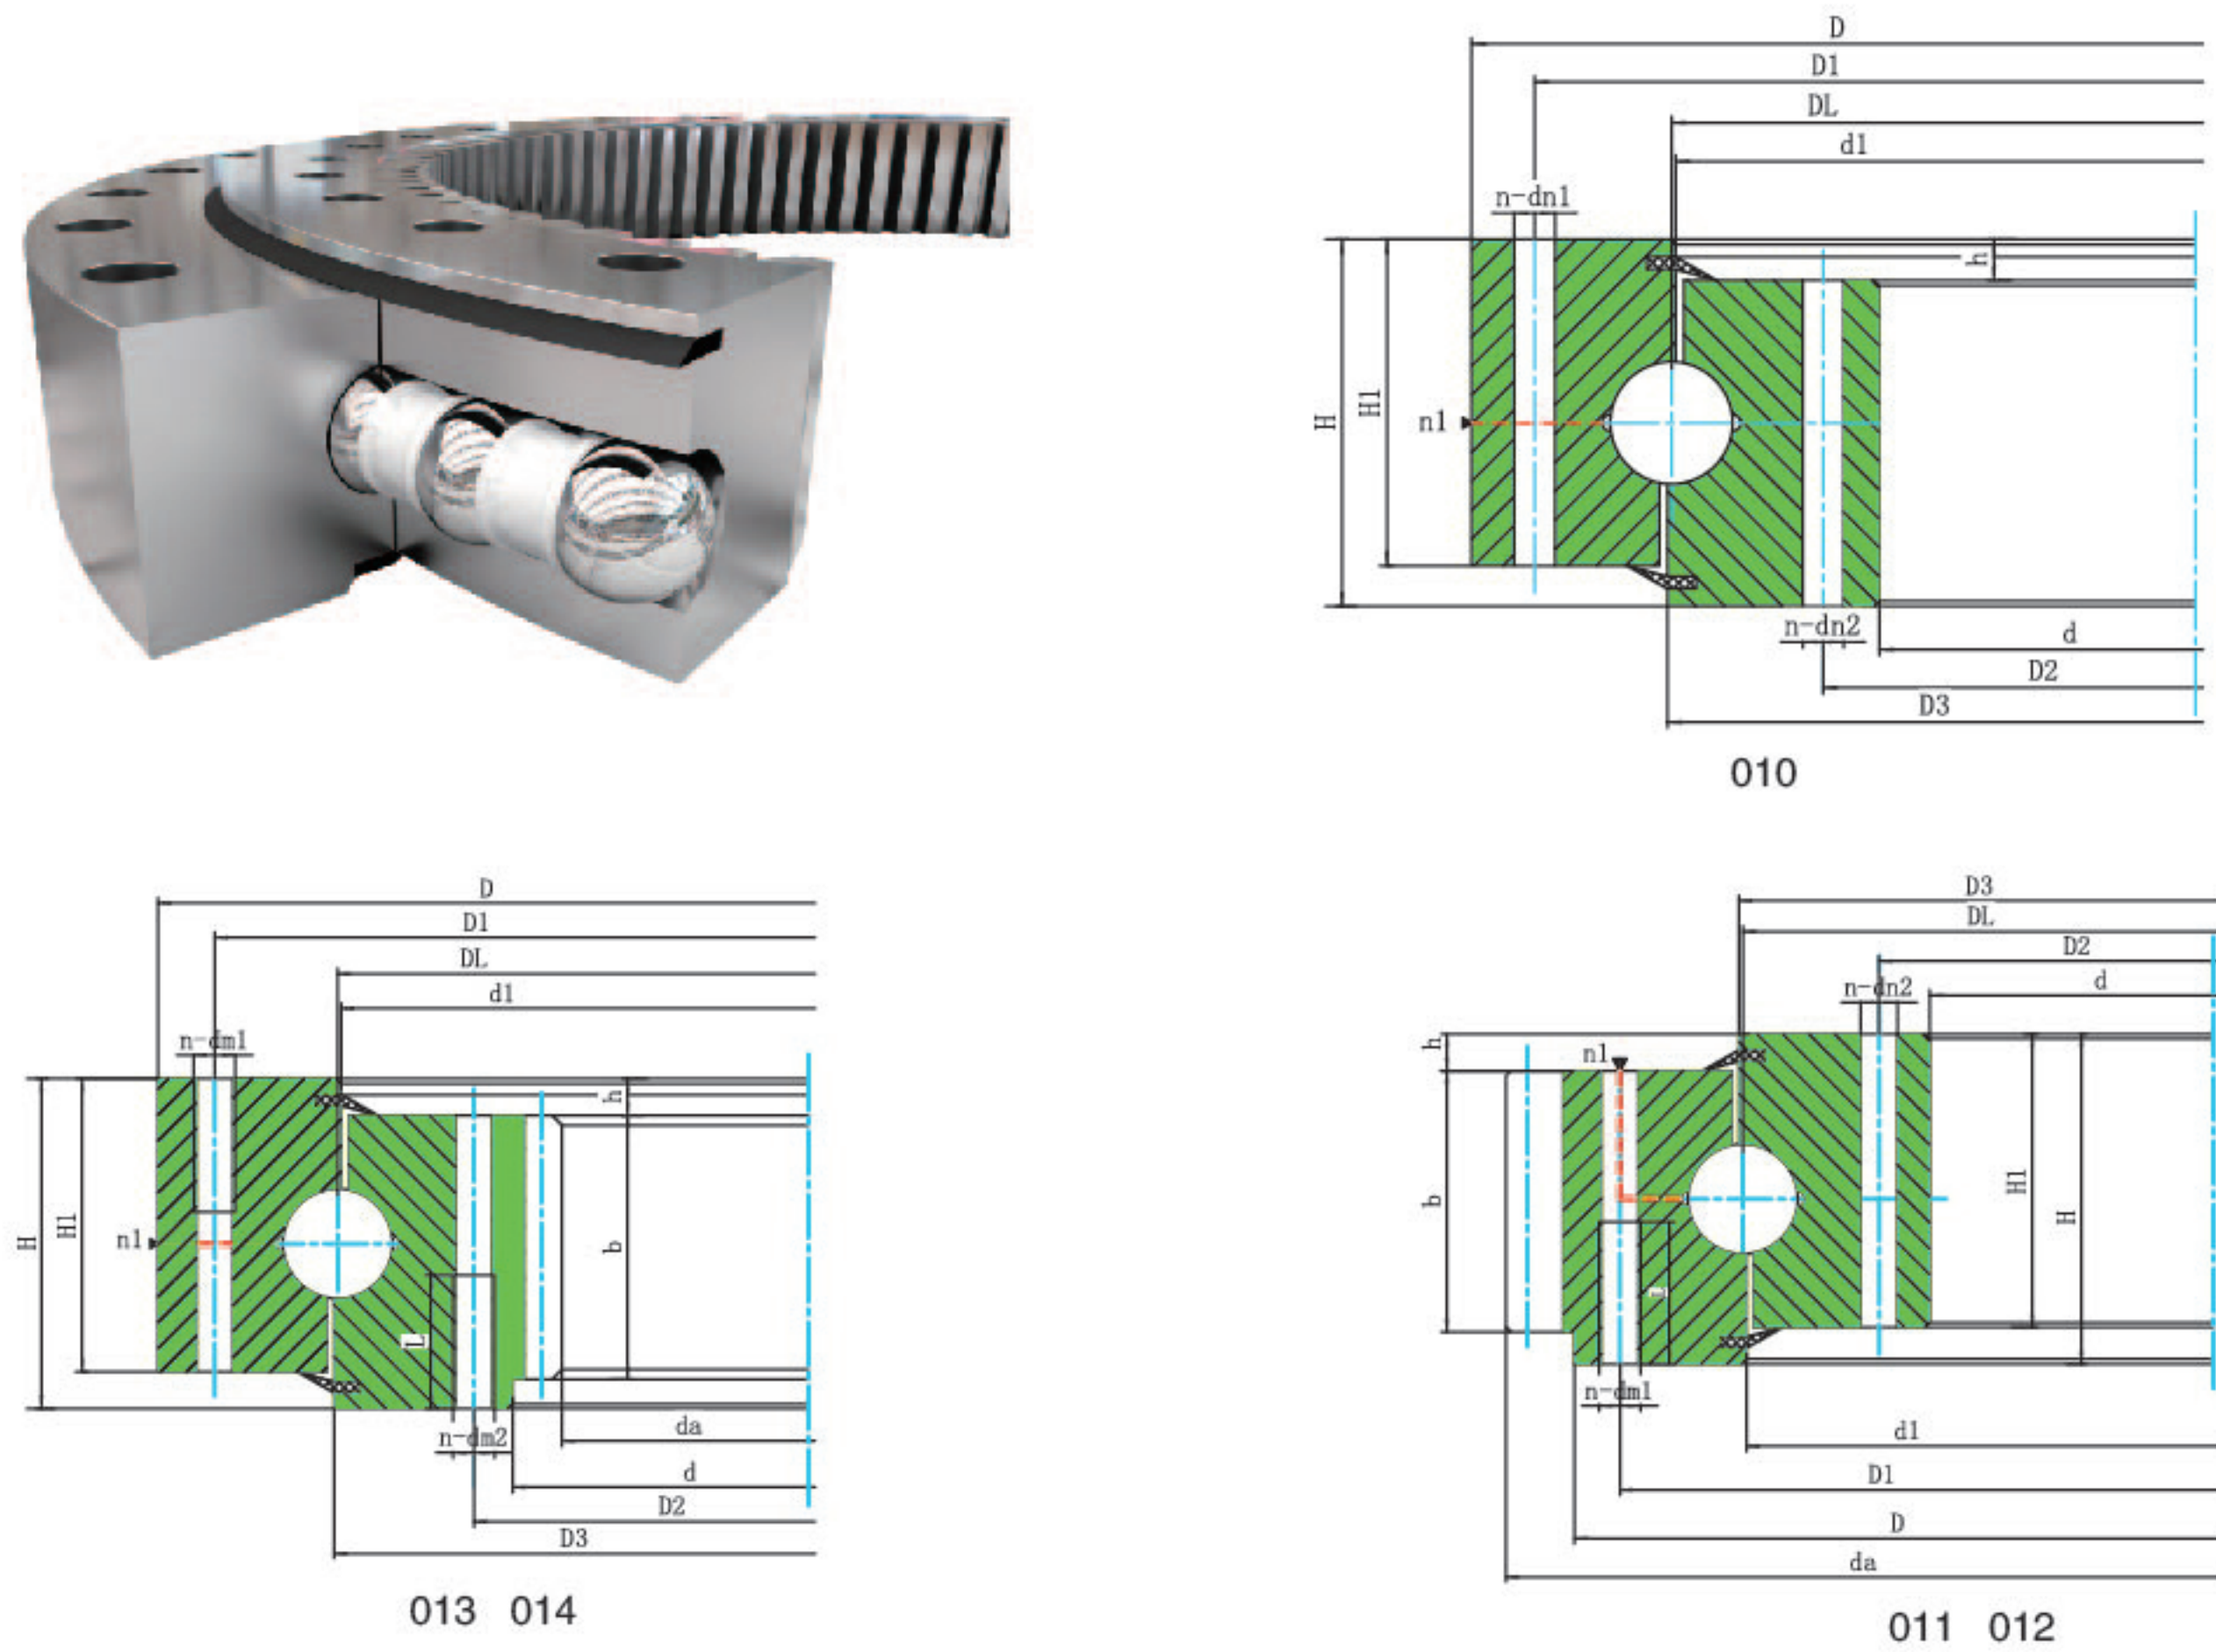

单排四点接触球式回转支承（01 系列）
Single-row four point contact ball type slewing bearing

		外形尺寸			安装孔尺寸						结构尺寸				齿轮参数		外齿参数		内齿参数		
代号	曲线	D (mm)	d (mm)	H (mm)	D ₁ (mm)	D ₂ (mm)	d _{n1} d _{n2} (mm)	d _{m1} d _{m2} (mm)	L (mm)	n	n ₁	D ₃ (mm)	d ₁ (mm)	H ₁ (mm)	h (mm)	b (mm)	m (mm)	d _a (mm)	z	d _a (mm)	z
01.45.1800	31	1940	1660	110	1887	1713	26	M24	48	45	5	1802	1798	100	10	90	14 16	2013.2 2012.8	141 123	1573.6 1574.4	113 99
01.35.1800	32	1940	1660	110	1887	1713	26	M24	48	45	5	1801	1798	100	10	90	14 16	2013.2 2012.8	141 123	1573.6 1574.4	113 99
01.60.2000	33	2178	1825	144	2110	1891	33	M30	60	48	8	2002	1998	132	12	120	16 18	2268.8 2264.4	139 123	1734.4 1735.2	109 97
01.40.2000	34	2178	1825	144	2110	1891	33	M30	60	48	8	2001	1998	132	12	120	16 18	2268.8 2264.4	139 123	1734.4 1735.2	109 97
01.60.2240	35	2418	2065	144	2350	2131	33	M30	60	48	8	2242	2238	132	12	120	16 18	2492.8 2498.4	153 136	1990.4 1987.2	125 111
01.40.2240	36	2418	2065	144	2350	2131	33	M30	60	48	8	2241	2238	132	12	120	16 18	2492.8 2498.4	153 136	1990.4 1987.2	125 111

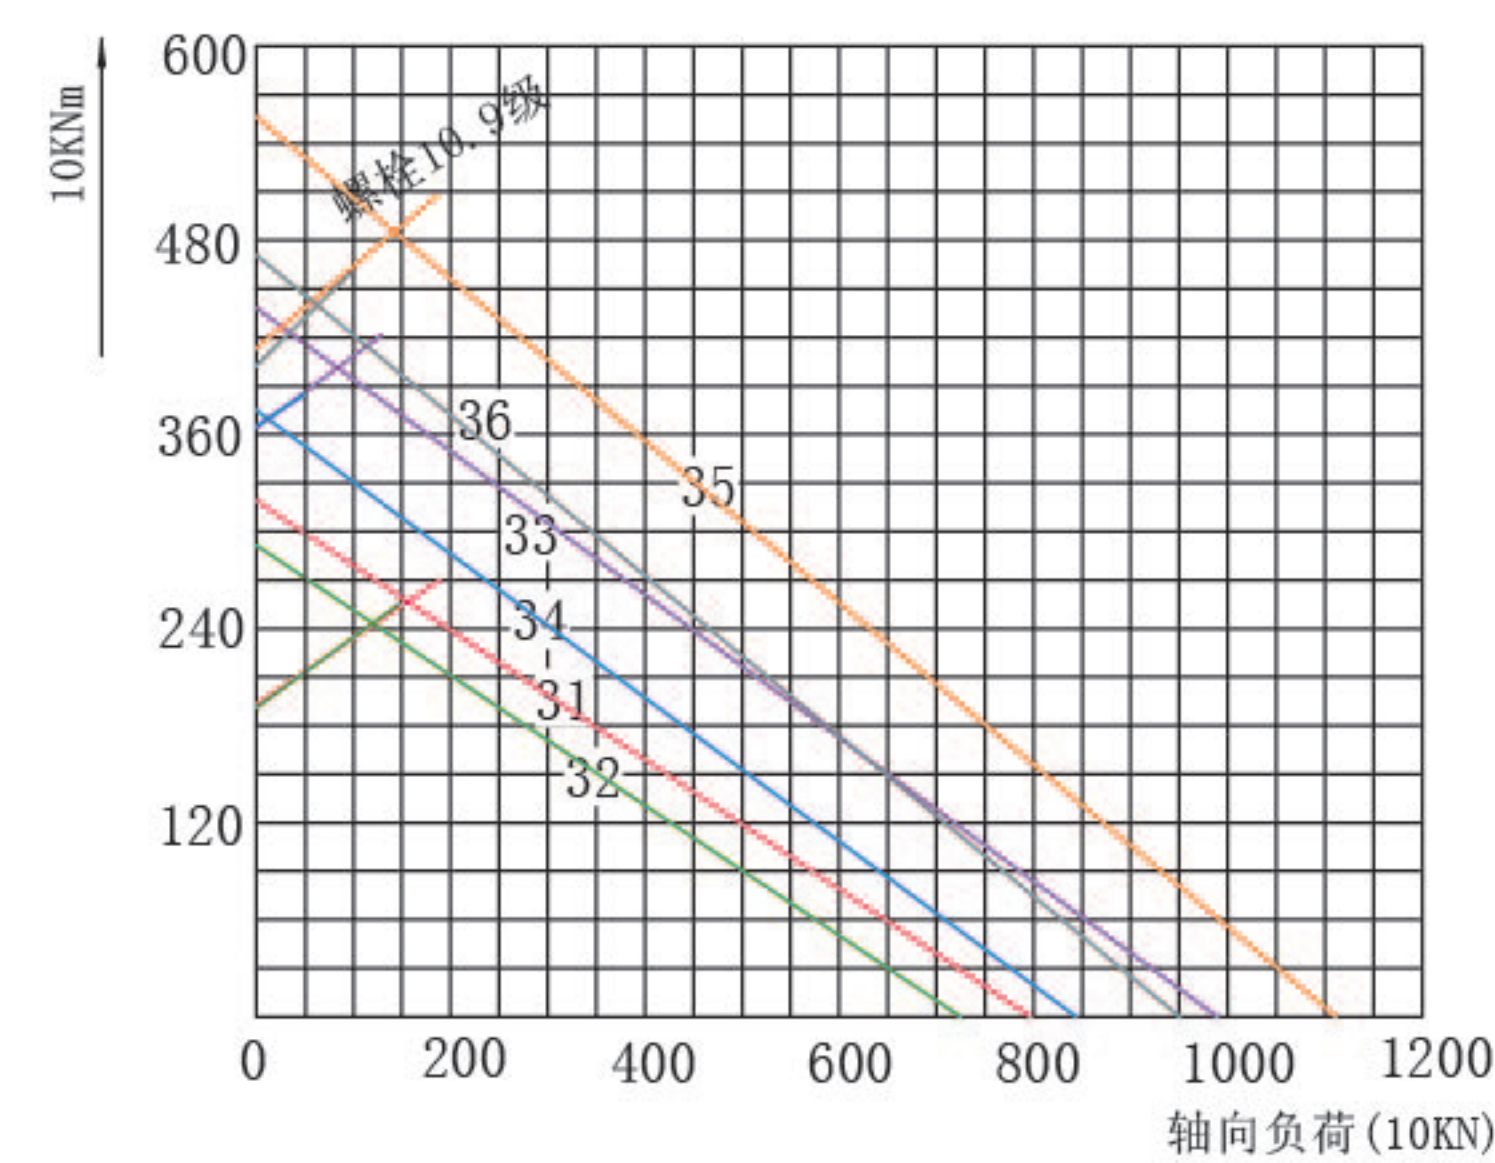
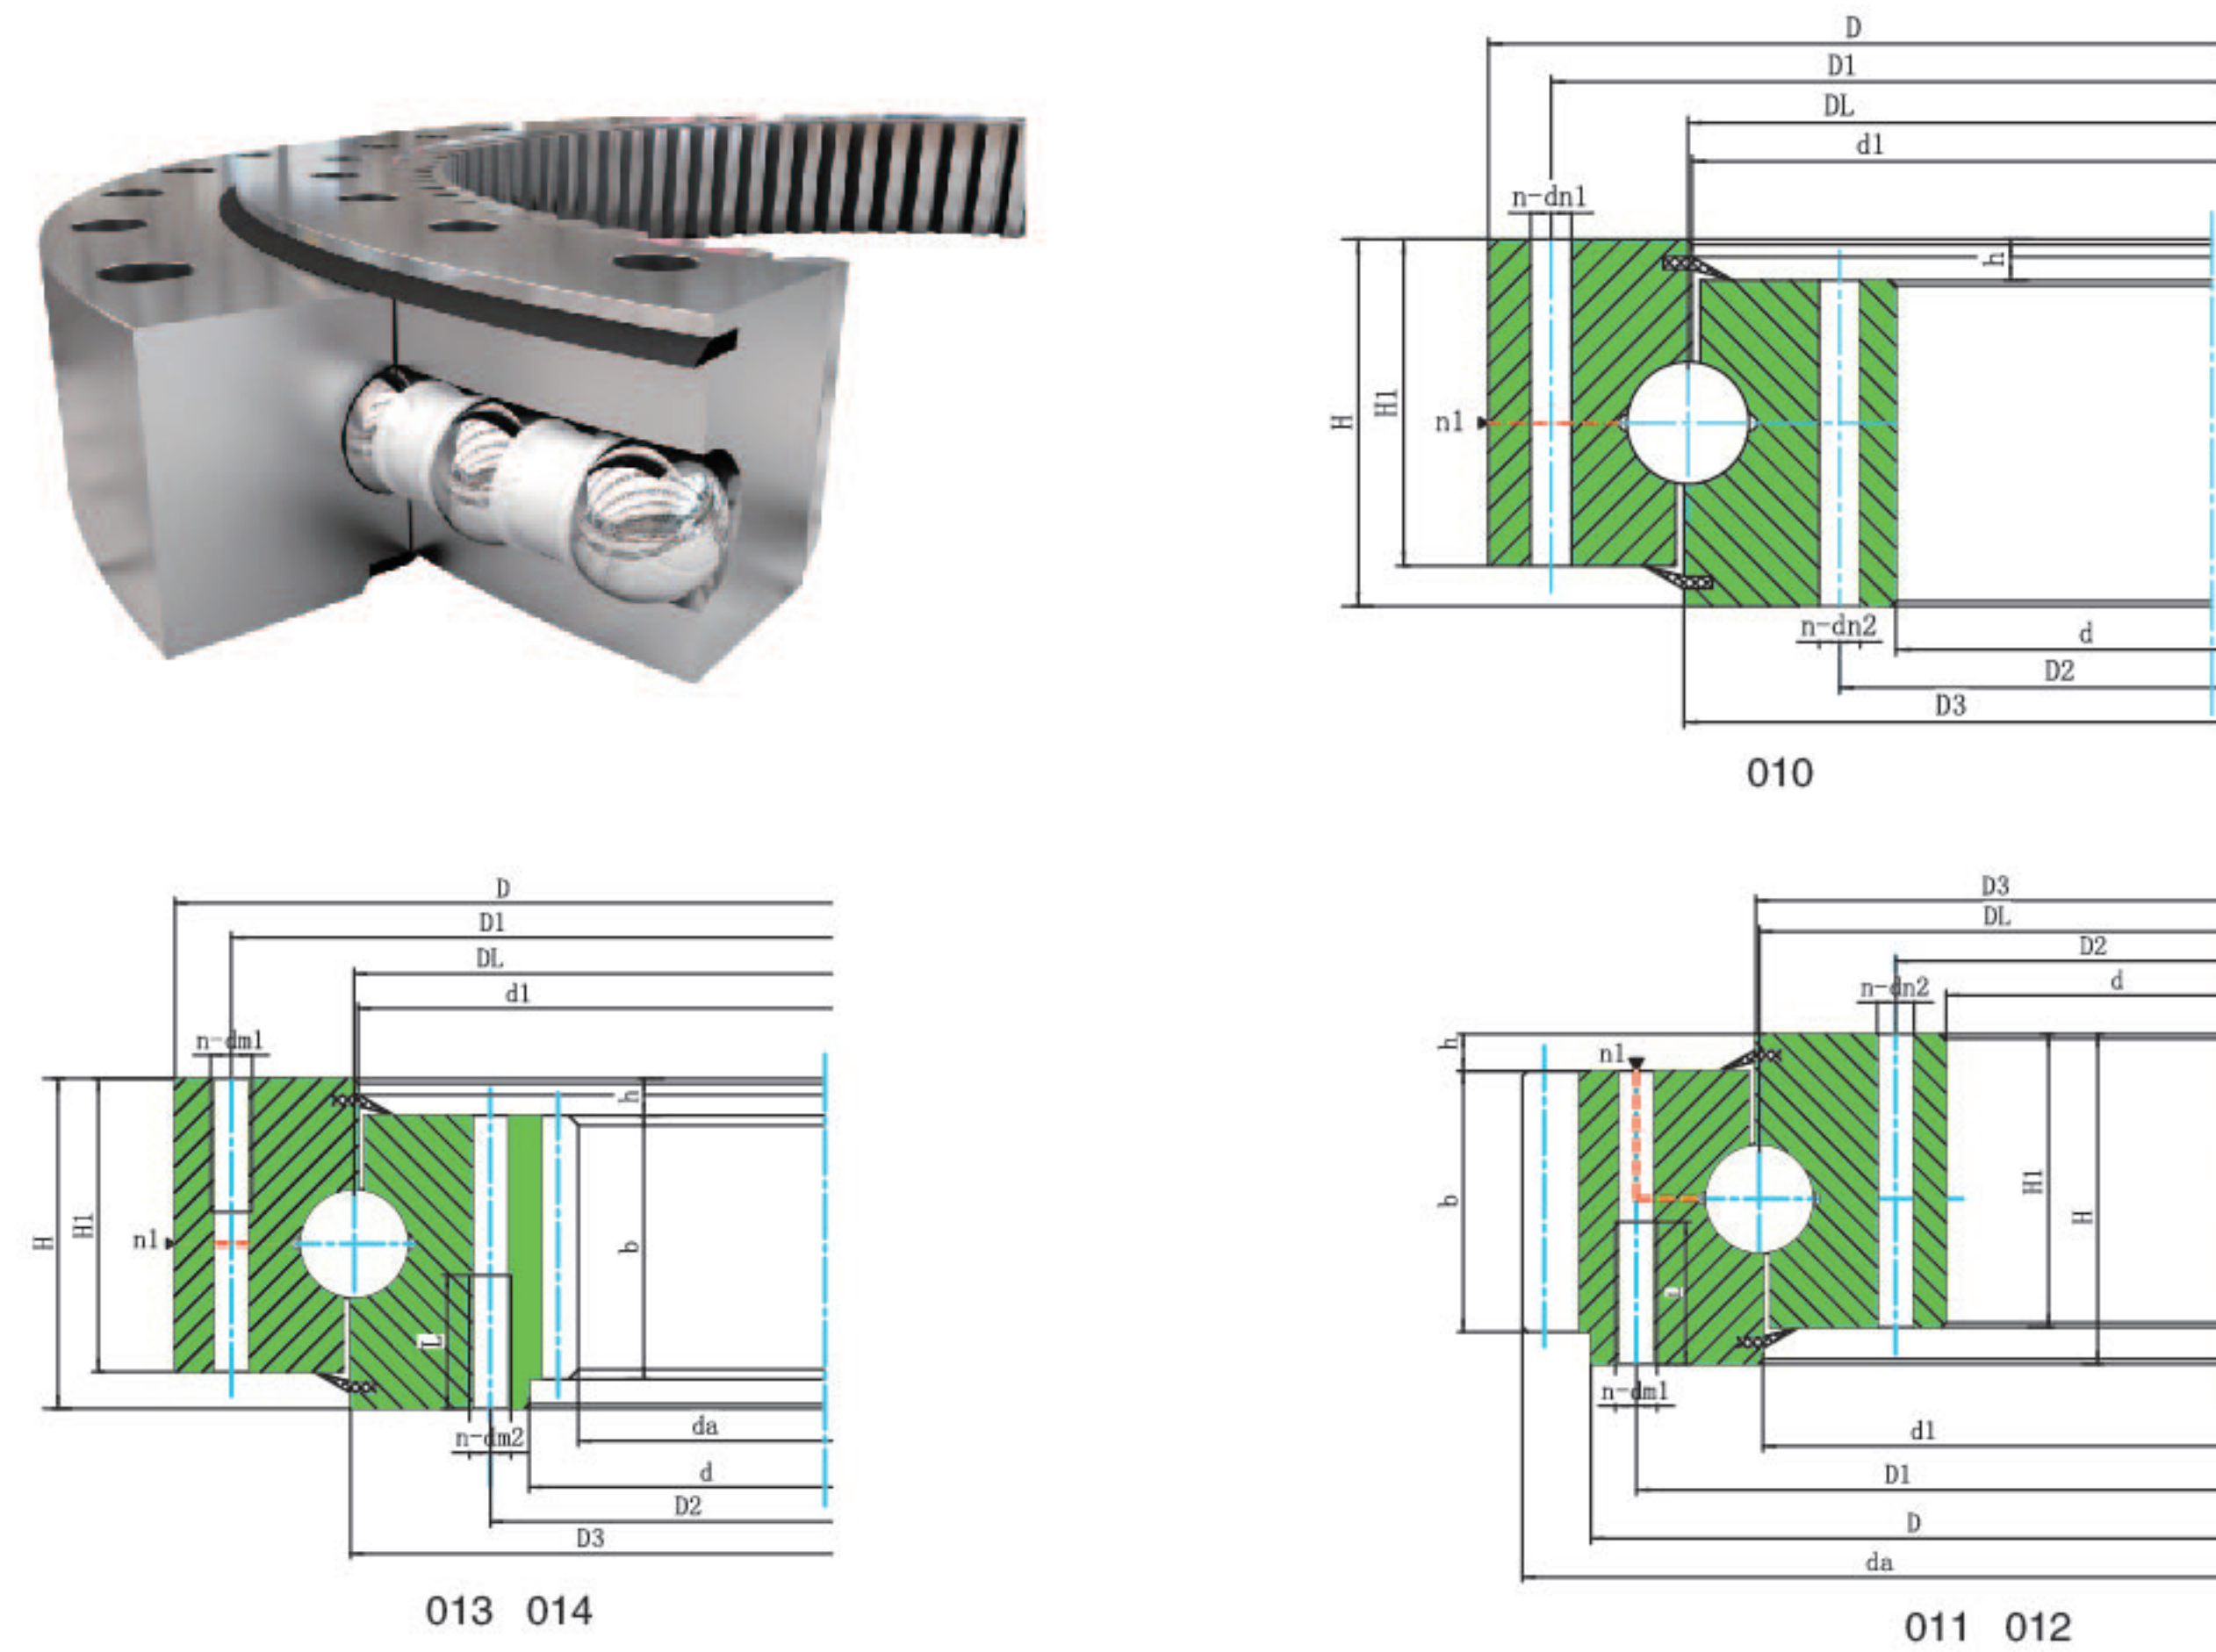


5 机械行业回转支承 (JB/T2300-1999 标准) 结构参数
Mechanical slewing bearings (JB/T2300-1999Standard) structure parameters



单排四点接触球式回转支承 (01 系列)
Single-row four point contact ball type slewing bearing

		外形尺寸			安装孔尺寸						结构尺寸				齿轮参数		外齿参数		内齿参数		
代号	曲线	D (mm)	d (mm)	H (mm)	D ₁ (mm)	D ₂ (mm)	d _{n1} d _{n2} (mm)	d _{m1} d _{m2} (mm)	L (mm)	n	n ₁	D ₃ (mm)	d ₁ (mm)	H ₁ (mm)	h (mm)	b (mm)	m (mm)	d _a (mm)	z	d _a (mm)	z
01.60.2500	37	2678	2325	144	2610	2391	33	M30	60	56	8	2502	2498	132	12	120	18 20	2768.4 2776	151 136	2339.2 2228	125 112
01.40.2500	38	2678	2325	144	2610	2391	33	M30	60	56	8	2501	2498	132	12	120	18 20	2768.4 2776	151 136	2339.2 2228	125 112
01.60.2800	39	2978	2625	144	2910	2691	33	M30	60	56	8	2802	2798	132	12	120	18 20	3074.4 3076	168 151	2527.2 2528	141 127
01.40.2800	40	2978	2625	144	2910	2691	33	M30	60	56	8	2801	2798	132	12	120	18 20	3074.4 3076	168 151	2527.2 2528	141 127
01.75.3150	41	3376	2922	174	3286	3014	45	M42	84	56	8	3152	3147	162	12	150	20 22	3476 3471.6	171 155	2828 2824.8	142 129
01.50.3150	42	3376	2922	174	3286	3014	45	M42	84	56	8	3152	3148	162	12	150	20 22	3476 3471.6	171 155	2828 2824.8	142 129

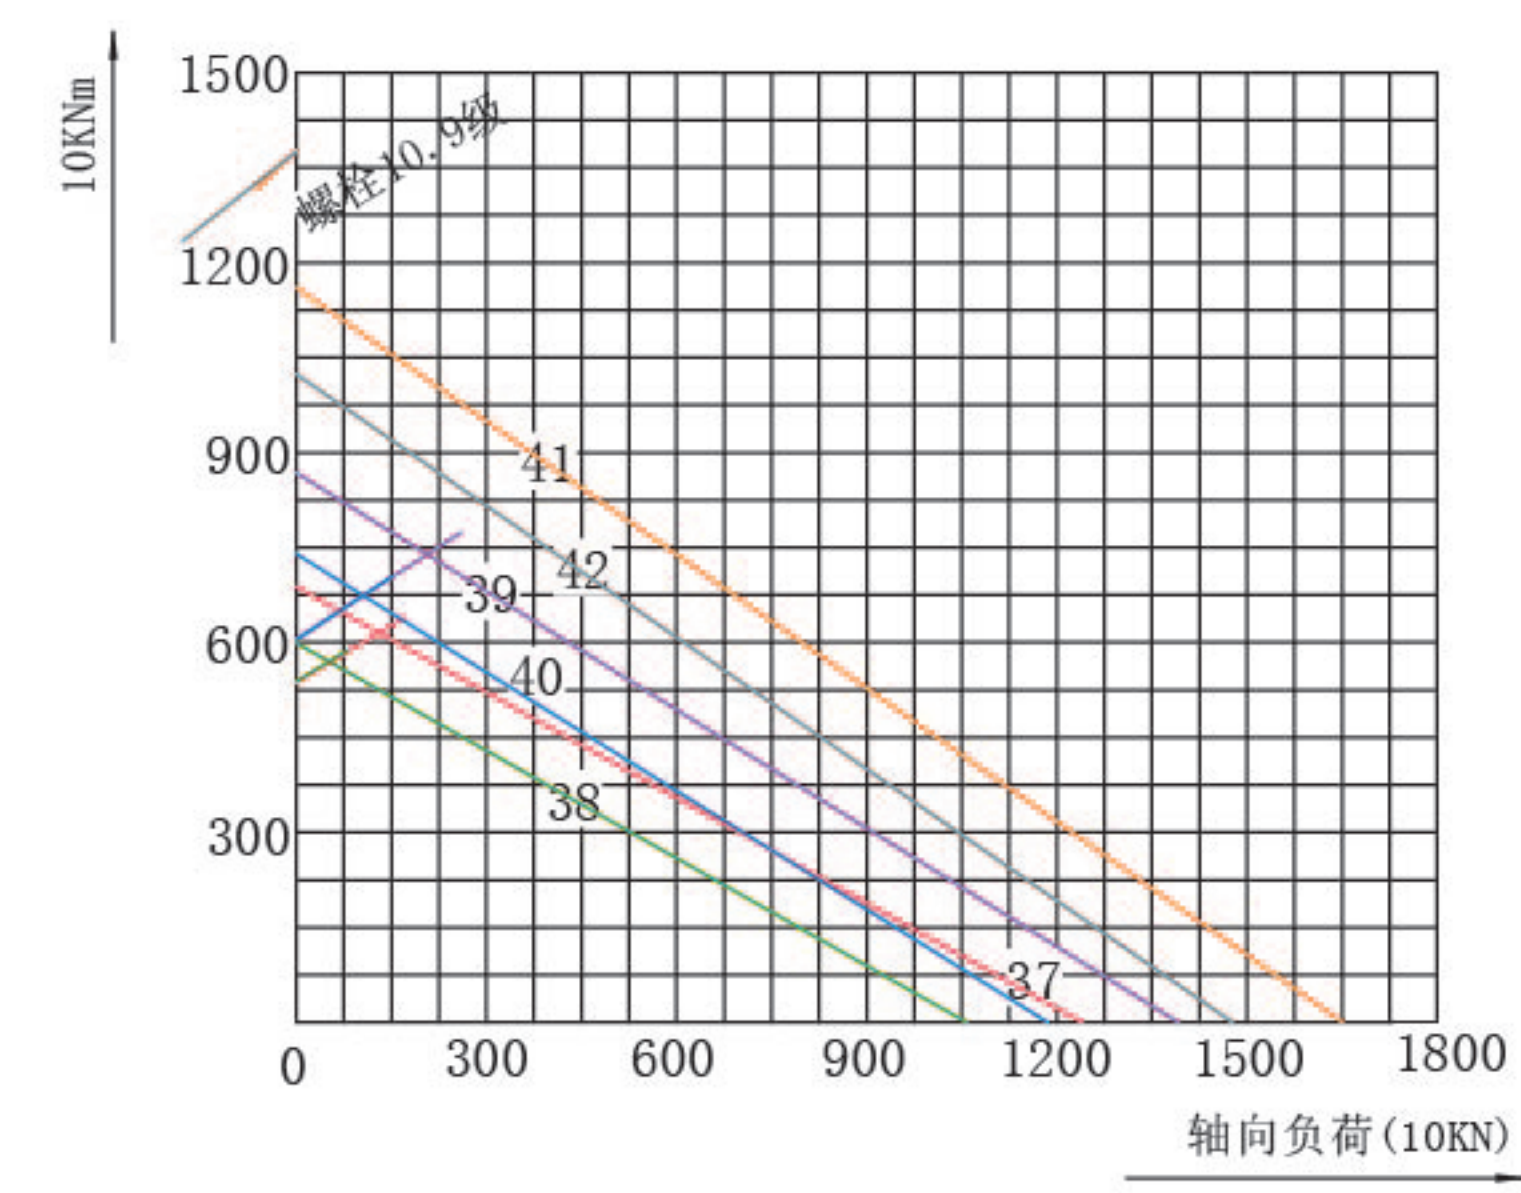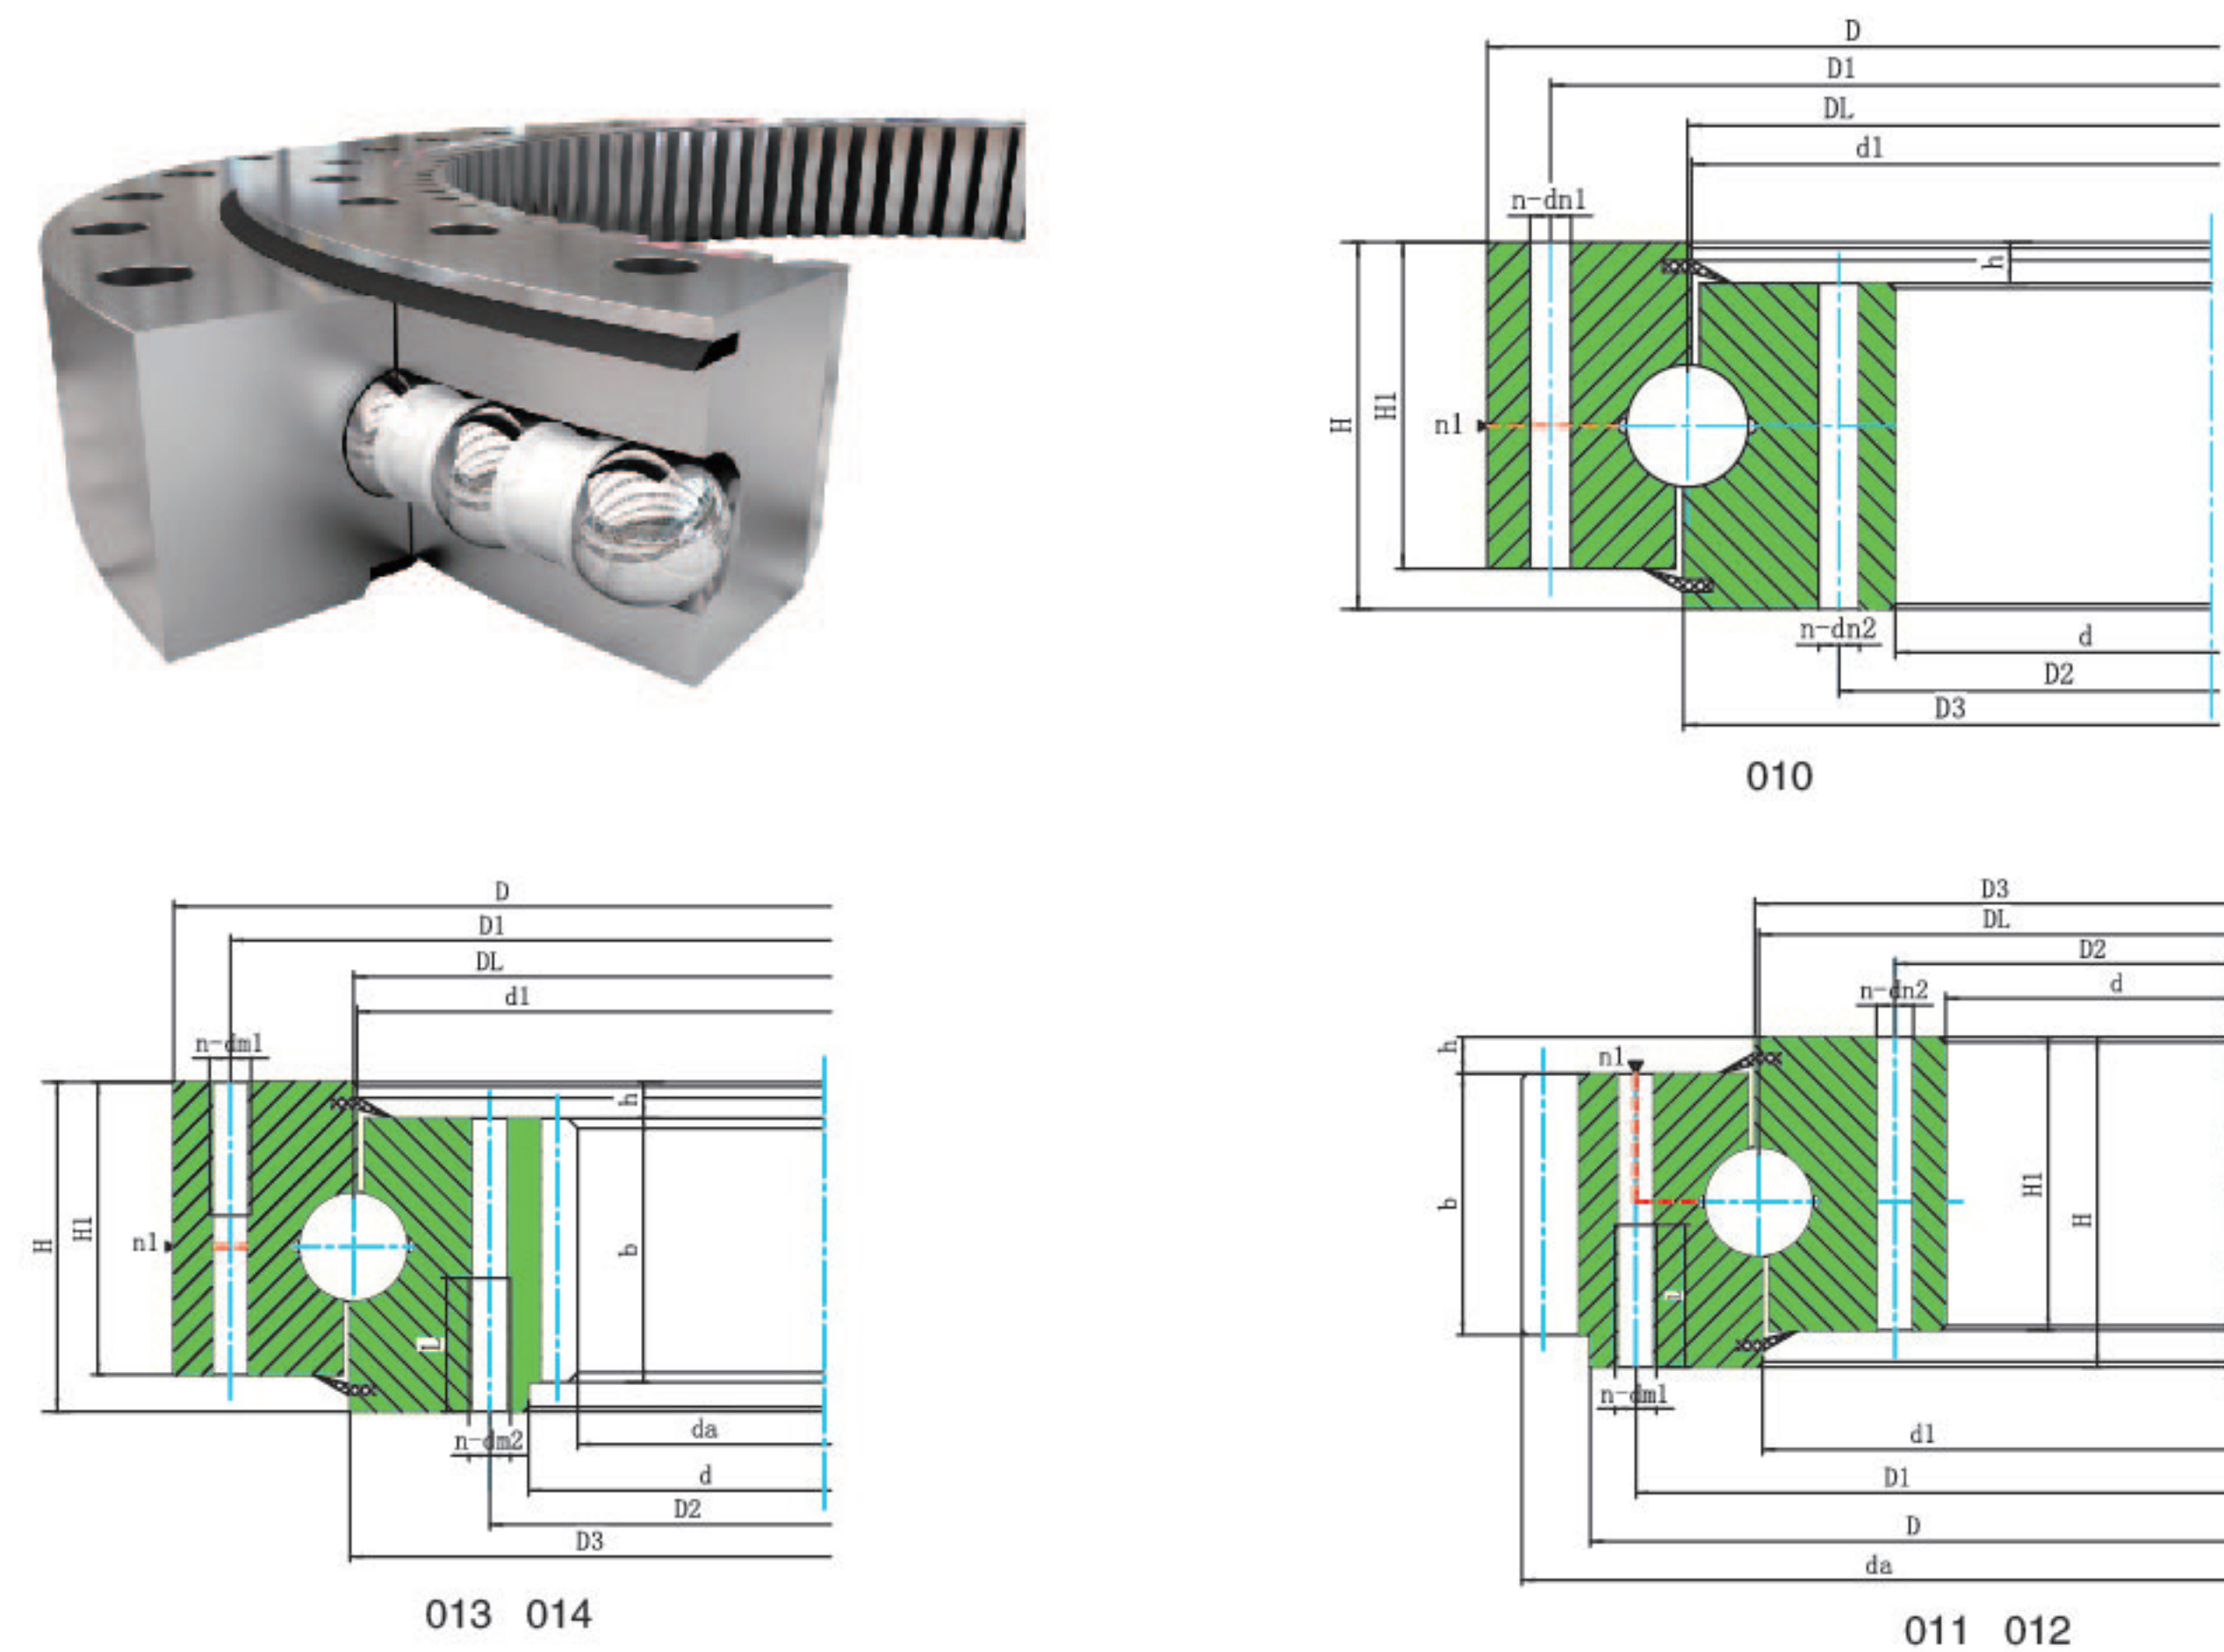

5 机械行业回转支承 (JB/T2300-1999 标准) 结构参数
Mechanical slewing bearings (JB/T2300-1999Standard) structure parameters



单排四点接触球式回转支承 (01 系列)
Single-row four point contact ball type slewing bearing

		外形尺寸			安装孔尺寸						结构尺寸					齿轮参数		外齿参数		内齿参数	
代号	曲线	D (mm)	d (mm)	H (mm)	D ₁ (mm)	D ₂ (mm)	d _{n1} d _{n2} (mm)	d _{m1} d _{m2} (mm)	L (mm)	n	n ₁	D ₃ (mm)	d ₁ (mm)	H ₁ (mm)	h (mm)	b (mm)	m (mm)	d _a (mm)	z	d _a (mm)	z
01.75.3550	43	3776	3322	174	3686	3414	45	M42	84	56	8	3552	3547	162	12	150	$\frac{20}{22}$	$\frac{3876}{3889.6}$	$\frac{191}{174}$	$\frac{3228}{3220.8}$	$\frac{162}{147}$
01.50.3550	44	3776	3322	174	3686	3414	45	M42	84	56	8	3552	3548	162	12	150	$\frac{20}{22}$	$\frac{3876}{3889.6}$	$\frac{191}{174}$	$\frac{3228}{3220.8}$	$\frac{162}{147}$
01.75.4000	45	4226	3772	174	4136	3864	45	M42	84	60	10	4002	3997	162	12	150	$\frac{22}{25}$	$\frac{4329.6}{4345}$	$\frac{194}{171}$	$\frac{3660.8}{3660}$	$\frac{167}{147}$
01.50.4000	46	4226	3772	174	4136	3864	45	M42	84	60	10	4002	3998	162	12	150	$\frac{22}{25}$	$\frac{4329.6}{4345}$	$\frac{194}{171}$	$\frac{3660.8}{3660}$	$\frac{167}{147}$
01.75.4500	47	4726	4272	174	4636	4364	45	M42	84	60	10	4502	4497	162	12	150	$\frac{22}{25}$	$\frac{4835.6}{4845}$	$\frac{217}{191}$	$\frac{4166.8}{4160}$	$\frac{190}{167}$
01.50.4500	48	4726	4272	174	4636	4364	45	M42	84	60	10	4502	4498	162	12	150	$\frac{22}{25}$	$\frac{4835.6}{4845}$	$\frac{217}{191}$	$\frac{4166.8}{4160}$	$\frac{190}{167}$

